

PCT/US 05/16261

## REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only	
PCT/US 05/16261	
09 MAY 2005 (09.05.05)	
International Filing Date	
PCT INTERNATIONAL APPLICATION	
RO/US	
Name of receiving Office and "PCT International Application"	

Applicant's or agent's file reference  
(if desired) (12 characters maximum) 38151/289328

Box No. I	TITLE OF INVENTION		MOBILE MEDICAL FACILITY	
Box No. II	APPLICANT	<input type="checkbox"/> This person is also inventor		
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)  CHARLOTTE-MECKLENBURG HOSPITAL AUTHORITY d/b/a CAROLINAS MEDICAL CENTER P. O. Box 32861 Charlotte, NC 28232-2861 US		Telephone No.		
		Facsimile No.		
		Applicant's registration No. with the Office		
State (that is, country) of nationality: US		State (that is, country) of residence: US		
This person is applicant for the purposes of: <input type="checkbox"/> all designated States		<input checked="" type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
Box No. III	FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)			
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)  BLACKWELL, Thomas H. 1353 Bellemeade Lane Charlotte, NC 28270 US		This person is:		
		<input type="checkbox"/> applicant only <input checked="" type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.)		
		Applicant's registration No. with the Office		
State (that is, country) of nationality: US		State (that is, country) of residence: US		
This person is applicant for the purposes of: <input type="checkbox"/> all designated States		<input type="checkbox"/> all designated States except the United States of America <input checked="" type="checkbox"/> the United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
<input checked="" type="checkbox"/> Further applicants and/or (further) inventors are indicated on a continuation sheet.				
Box No. IV	AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE			
The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as: <input checked="" type="checkbox"/> agent <input type="checkbox"/> common representative				
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)  DRYSDALE, Glen R. ALSTON & BIRD LLP Bank of America Plaza 101 South Tryon Street, Suite 4000 Charlotte, NC 28280-4000 US		Telephone No. Charlotte Office (704) 444-1000		
		Facsimile No. Charlotte Office (704) 444-1111		
		Agent's registration No. with the Office 56,342		
<input type="checkbox"/> Address for correspondence: Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent				

## Continuation of Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

If none of the following sub-boxes is used, this sheet should not be included in the request.

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)  <div style="text-align: center;">STALEY, Kevin T. 4957 Dayspring Drive Charlotte, NC 28227 US</div>		This person is: <input type="checkbox"/> applicant only <input checked="" type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office
State (that is, country) of nationality: US		State: (that is, country) of residence. US
This person is applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input checked="" type="checkbox"/> The United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)		This person is: <input type="checkbox"/> applicant only <input type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office
State (that is, country) of nationality		State: (that is, country) of residence:
This person is applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> The United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)		This person is: <input type="checkbox"/> applicant only <input type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office
State (that is, country) of nationality:		State: (that is, country) of residence:
This person is applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> The United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (that is, country) of residence if no State of residence is indicated below.)		This person is: <input type="checkbox"/> applicant only <input type="checkbox"/> applicant and inventor <input type="checkbox"/> inventor only (If this check-box is marked, do not fill in below.) Applicant's registration No. with the Office
State (that is, country) of nationality.		State: (that is, country) of residence:
This person is applicant for the purposes of: <input type="checkbox"/> all designated States <input type="checkbox"/> all designated States except the United States of America <input type="checkbox"/> The United States of America only <input type="checkbox"/> the States indicated in the Supplemental Box		
<input type="checkbox"/> Further applicants and/or (further) inventors are indicated on another continuation sheet.		

CONTINUATION OF BOX NO. IV

The following additional attorneys or agents, in their capacity as representatives of, ALSTON & BIRD LLP, are also appointed:

ACHEY, Wesley	KOSTER, Karl H.
ANDERSON, J. Scott	LAWSON, Lance A.
ARROYO, Blas P.	LINKER, Raymond O., Jr.
ARZU, Quetia	LIPSCOMB, Ernest B., III
ATKINSON, William M.	LUPO, Dickson M.
BALTS, Timothy	LYN, Kevin R.
BARNHARDT, John J., III	MALIK, Jitendra
BATES, Andrea E.	MANNING, Amy
BRACKEN, Joseph E.	McCLELLAND, Todd S.
BELL, Paul B.	McCOY, Michael D.
BLACK, C. Allen	McDERMOTT, Richard M.
BRADLEY, Kirk T.	MCNIFF, Stephen
BRIDGES, Douglas	MEUNIER, Andrew T.
BRIENT, Scott E.	MILLER, Jennifer F.
BROYLES, Keith E.	MORSE, Karen M.
CAGLE, Ryan	O'BRIEN, Kevin A.
CARLIN, Gregory	PARKER, Thomas
CONNOR, Michael S.	PEDIGO, Paul F.
COOPER, Jason P.	PICHÉ, Jason
COOPER, Jeffrey	PLEUNE, Scott B.
CORNETT, David Anthony	PRINCE, Edward M.
COULTER, Kathryn L.	RANSOM, W. Kevin
CUNNINGHAM, Michelle	ROBERSON, Keith
DRYSDALE, Glen	ROSE, Bruce J.
EDWARDS, James C.	SARAVITZ, David
ELDERKIN, Charles B.	SCHAEFER, Bryan W.
ELLSWORTH, Brian	SCOTT, Walter
ELSEVIER, Patrick	SIDBURY, Benjamin F.
ERGENZINGER, Edward	SPENCE, Andrew
FINNISS, Alexis W.	SPRUILL, W. Murray
GALLO, Nicholas F.	STREAN, Flynt
GEGG, Christopher	STRUBY, Meredith W.
GOSNELL, Guy R.	SULLIVAN, John L., Jr.
GREGG, Heather L.	TAULBEE, George M.
GRONHOLM, Gregory	TEAGUE, Brian J.
HALL, Cynthia	TESKE, David
HAYNES, John D.	THORNE, Leigh W.
HENRY, Leslie T.	URBANAWIZ, Matthew
HERNDON, J. Perry	WARD, III, Henry B.
HIGGINS, John P.	WASLEFF, John A.
HILL, Donald M., Jr.	WILLIAMSON, Kelly J.
HUMPHREY, Christopher M.	WILSON, J. Mark
JONES, Larry C.	WINBORNE, George O.
JURGOVAN, Jon M.	YOUNG, Jeffrey
KIRK, Trent A.	YOUNG, J. Scott

All of the firm and address identified in Box No. IV.

**Box No. V DESIGNATIONS**

The filing of this request constitutes under Rule 4.9(a), the designation of all Contracting States bound by the PCT on the international filing date, for the grant of every kind of protection available and, where applicable, for the grant of both regions and national patents.

However,

- ☐ DE Germany is not designated for any kind of national protection
- ☐ KR Republic of Korea is not designated for any kind of national protection
- ☐ RU Russian Federation is not designated for any kind of national protection

(The check-boxes above may be used to exclude (irrevocably) the designations concerned in order to avoid the ceasing of the effect, under the national law, of an earlier national application from which priority is claimed. See the Notes to Box No. V as to the consequences of such national law provisions in these and certain other States.)

**Box No. VI PRIORITY CLAIM**

The priority of the following earlier application(s) is hereby claimed

Filing date of earlier application (day/month/year)	Number of earlier application	Where earlier application is:		
		national application country or Member of WTO	regional application:* regional Office	international application: receiving Office
item (1) 12 May 2004 (12.05.04)	60/570,311	US		
item (2)				
item (3)				

☐ Further priority claims are indicated in the Supplemental Box

The receiving Office is requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) (only if the earlier application was filed with the Office which for the purposes of this international application is the receiving Office) identified above as:

☐ all items ☒ item (1) ☐ item (2) ☐ item (3) ☐ other, see Supplemental Box

\* Where the earlier application is an ARIPO application, indicate at least one country party to the Paris Convention for the Protection of Industrial Property or one Member of the World Trade Organization for which that earlier application was filed (Rule 4.10(b)(ii)):

**Box No. VII INTERNATIONAL SEARCHING AUTHORITY**

Choice of International Searching Authority (ISA) (if two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used):

ISA /US

Request to use results of earlier search; reference to that search (if an earlier search has been carried out by or requested from the International Searching Authority):

Date (day/month/year)                      Number                      Country (or regional Office)

**Box No. VIII DECLARATIONS**

The following declarations are contained in Boxes Nos. VIII(i) to (v) (mark the applicable check-boxes below and indicate in the right column the number of each type of declaration):

		Number of declarations
<input type="checkbox"/> Box No. VIII(i)	Declaration as to the identity of the inventor	:
<input type="checkbox"/> Box No. VIII(ii)	Declaration as to the applicant's entitlement, as at the international filing date, to apply for and be granted a patent	.
<input type="checkbox"/> Box No. VIII(iii)	Declaration as to the applicant's entitlement, as at the international filing date, to claim the priority of the earlier application	:
<input type="checkbox"/> Box No. VIII(iv)	Declaration of inventorship (only for the purposes of the designation of the United States of America)	:
<input type="checkbox"/> Box No. VIII(v)	Declaration as to non-prejudicial disclosures or exceptions to lack of novelty	:

Box No. IX

**PCT/RO/101 LANGUAGE OF FILING**

This international application contains:

(a) in paper form, the following number of sheets:

request (including declaration sheets) : 5

description (excluding sequence listings and/or tables related thereto) : 18

claims : 4

abstract : 1

drawings : 14

Sub-total number of sheets sequence listings : 42

tables related thereto :  
(for both, actual number of sheets if filed in paper form, whether or not also filed in computer readable form; see (c) below):

Total number of sheets : 42

(b) ☐ only in computer readable form (Section 801(a)(i))(i) ☐ sequence listings(ii) ☐ tables related thereto(c) ☐ also in computer readable form (Section 801(a)(ii))(i) ☐ sequence listings(ii) ☐ tables related thereto

Type and number of carriers (diskette, CD-ROM, CD-R or other) on which are contained the

☐ sequence listings.....☐ tables related thereto .....

(additional copies to be indicated under item 9(ii) and/or 10(ii), in right column)

This international application is accompanied by the following item(s) (mark the applicable check-boxes below and indicate in right column the number of each item):


- |     |                                     |   |     |
|-----|-------------------------------------|---|-----|
| 1.  | <input checked="" type="checkbox"/> | fee calculation sheet   | : 1 |
| 2.  | <input type="checkbox"/>            | original separate power of attorney   | :   |
| 3.  | <input type="checkbox"/>            | original general power of attorney  | :   |
| 4.  | <input type="checkbox"/>            | copy of general power of attorney; reference number, if any:.....   | :   |
| 5.  | <input type="checkbox"/>            | statement explaining lack of signature  | :   |
| 6.  | <input type="checkbox"/>            | priority document(s) identified in Box No. VI as item(s):.....  | :   |
| 7.  | <input type="checkbox"/>            | translation of international application into (language).....   | :   |
| 8.  | <input type="checkbox"/>            | separate indications concerning deposited microorganism or other biological material  | :   |
| 9.  | <input type="checkbox"/>            | sequence listings in computer readable form (indicate type and number of carriers)  | :   |
|     | (i)                                 | <input type="checkbox"/> copy submitted for the purposes of international search under Rule 13ter only (and not as part of the international application)   | :   |
|     | (ii)                                | <input type="checkbox"/> (only where check-box (b)(i) or (c)(i) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Rule 13ter               | :   |
|     | (iii)                               | <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the sequence listings mentioned in left column  | :   |
| 10. | <input type="checkbox"/>            | tables in computer readable form related to sequence listings (indicate type and number of carriers)  | :   |
|     | (i)                                 | <input type="checkbox"/> copy submitted for the purposes of international search under Section 802(b-quarter) only (and not as part of the international application)   | :   |
|     | (ii)                                | <input type="checkbox"/> (only where check-box (b)(ii) or (c)(ii) is marked in left column) additional copies including, where applicable, the copy for the purposes of international search under Section 802(b-quarter) | :   |
|     | (iii)                               | <input type="checkbox"/> together with relevant statement as to the identity of the copy or copies with the tables mentioned in left column   | :   |
| 11. | <input checked="" type="checkbox"/> | other (specify): <u>Transmittal Letter and Postcard</u>   | : 2 |

Figure of the drawings which should accompany the abstract: 5

Language of filing of the international application: English

## Box No. X SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).

Glen R. Drysdale  
Attorney for Applicant

For receiving Office use only

(09.05.05)

1. Date of actual receipt of the purported international application:	<b>3C10 Rec'd PCT/PTO 09 MAY 2005</b>	2. Drawings:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:		<input type="checkbox"/> received:
4. Date of timely receipt of the required corrections under PCT Article 11(2)		<input type="checkbox"/> not received:
5. International Searching Authority (if two or more are competent): <b>ISA/ EP</b>		6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

PCT/USPCT 16261

# FEE CALCULATION SHEET Annex to the Request

For receiving Office use only  
PCT/US 05/16261  
International Application No.

Applicant's or agent's  
file reference 38151/289328

09 MAY 2005 (09.05.05)

Date stamp of the receiving Office

Applicant CHARLOTTE-MECKLENBURG HOSPITAL AUTHORITY d/b/a  
CAROLINAS MEDICAL CENTER

## CALCULATION OF PRESCRIBED FEES

1. TRANSMITTAL FEE ..... | USD 300 T

2. SEARCH FEE ..... | 1,000 S

International search to be carried out by ISA/US  
(If two or more International Searching Authorities are competent to carry out the international search, indicate the name of the Authority which is chosen to carry out the international search.)

3. INTERNATIONAL FILING FEE

Where items (b) and/or (c) of Box No. IX apply, enter Sub-total number of sheets

Where items (b) and (c) of Box No. IX do not apply, enter Total number of sheets } 42

first 30 sheets ..... | 1,211 i1

12 x 13 = ..... | 156 i2  
number of sheets fee per sheet  
in excess of 30

additional component (only if sequence listings and/or tables related  
thereto are filed in computer readable form under Section 801(a)(i),  
or both in that form and on paper, under Section 801(a)(ii):

400 X ..... = ..... | i3  
fee per sheet

Add amounts entered at i1, i2 and i3 and enter total at I .. | 1,367 I

(Applicants from certain States are entitled to a reduction of 75% of the international fee. Where the applicant is (or all applicants are) so entitled, the total to be entered at I is 25% of the international filing fee.)

4. FEE FOR PRIORITY DOCUMENT (if applicable) ..... | 20 P

5. TOTAL FEES PAYABLE ..... | 2,687  
Add amounts entered at T, S, I and P, and enter total in the TOTAL box TOTAL

300

1000

1211

156

1367

20

2687

## MODE OF PAYMENT

- ☐ Authorization to charge deposit account (see below) ☐ postal money order ☐ cash ☐ coupons  
☒ cheque ☐ bank draft ☐ revenue stamps ☐ other (specify):

## AUTHORIZATION TO CHARGE (OR CREDIT) DEPOSIT ACCOUNT

(This mode of payment may not be available at all receiving Offices)

- ☐ Authorization to charge the total fees indicated above.  
☒ Authorization to charge any deficiency or credit any overpayment in the total fees indicated above.  
☐ Authorization to charge the fee for priority document.

Receiving Office: US

Deposit Account No. 16-0605

Date: 09 May 2005

Name: Glen R. Drysdale

Signature

*Glen R. Drysdale*

## MOBILE MEDICAL FACILITY

### FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

The research underlying this invention was supported in part with funds from United States Department of Homeland Security Grant No. 233-03-0081.

- 5 The United States Government may have an interest in the subject matter of this invention.

### FIELD OF THE INVENTION

- 10 The present invention is generally related to medical treatment facilities and more particularly mobile or portable ones.

### BACKGROUND OF THE INVENTION

- Disasters happen despite society's best efforts to prevent them. The causes of disasters are many and numerous including, but not limited to, terrorism, weather, and accidents. However a common tragic consequence regardless of the cause is the mass casualties that often results from a disaster. The influx of mass casualties can overwhelm the local medical facilities. Furthermore, the local medical facilities may be compromised from the disaster. For example, a local hospital or hospitals may be on the list of damaged facilities from a destructive hurricane.
- 15  
20

- Typically, temporary medical facilities are established near the disaster zone or area to reinforce the existing local medical facilities or worse replace them in order to treat the mass casualties. The effectiveness of these temporary medical facilities is heavily dependent on the speed in which the facilities can be established and the capabilities of the facilities once established. The size and condition of the hosting structure or structures for the facility and the supplies, equipment, and personnel available all contribute, among other things, to the capability of that medical facility. A temporary medical facility even with state of the art medical capabilities is of a little help if the facility is not established relatively soon after the disaster to treat the casualties. Likewise, a temporary
- 25  
30

medical facility established soon after the disaster with limited medical capability is of limited help to the mass casualties.

Past reactions and planning for disasters have produced a variety of temporary medical facilities. For example, the military and civil authorities often use evacuated buildings or other structures to establish these facilities. Existing structures may provide adequate housing and a relatively clean environment for a facility. However existing structures are not always available or the safety of the existing structures may be in doubt in view of the disaster. Also, structures alone do not provide a functional medical facility. Medical personnel, supplies and equipment are still needed. Therefore even in circumstances where existing structures are available, the authorities are still challenged with providing adequate supplies, equipment, and personnel for the facility.

Instead of relying on existing structures for housing, sometimes the housing is shipped or transported to the disaster area along with the supplies, equipment, and personnel. In some cases, portable permanent structures are transported to the disaster area. However these structures typically have either very limited space in which to host the facility or require extensive transportation means to deliver the structure to or near the disaster zone. Furthermore, coordinating for the movement of such structures often requires too much time. In other cases, portable non-permanent or semi-permanent structures are transported in. For example, tents or modular-type buildings can be utilized. Transporting these structures is relatively easier because they can be broken down into parts for shipping. However, once these structures arrive they require substantial set-up time and manpower; time and manpower that often are not available. Furthermore, non-permanent or semi-permanent systems often are not conducive to a clean and controlled environment that is desired for a medical facility.

In light of the foregoing, it is desirable to provide a portable medical facility that can reinforce or help replace the existing local medical facilities after a disaster. In particular it would be advantageous for the portable medical facility to have the capabilities to treat numerous patients including patients in need of urgent care. Also it would be advantageous if the medical facility can be transported to and set up near the disaster area in a short amount of time with



minimal personnel. Preferably, transporting of the facility should not require extensive transporting means.

### BRIEF SUMMARY OF THE INVENTION

5           The present invention addresses the above needs and achieves other advantages by providing a mobile medical facility capable of treating numerous patients and being transported over a highway or road without requiring extensive transporting means. In general the mobile medical facility includes a trailer. The trailer defines a floor area and has at least a first and second configuration. In the  
10 first configuration, the floor area is reduced to allow for the transporting of the trailer over the public highways. In the second configuration, the floor area of the trailer is expanded and large enough to support numerous beds for treating patients. In some embodiments, the floor area in the second configuration may be at least twice as large as the floor area in the first configuration. For example, the  
15 floor area in the second configuration may be approximately 924 square feet and the floor area in the first configuration may be approximately 422 square feet.

          The mobile medical facility may also include any one or all of the following: one or more tractors, an awning system, and one or more additional trailers. The tractor or tractors may be used to transport the trailer or trailers to the  
20 area in need of an additional medical facility. The awning system may be used to provide an extended protective area adjacent to one of the trailers. Additional trailers may be used to store and transport equipment or provide a rest or sleep area for the medical personnel.

          In one embodiment, the present invention provides a trailer for providing a  
25 patient care facility. The trailer may include at least one treatment area. Each treatment area defines a floor area and has at least two configurations. In one configuration, the floor area is capable of supporting numerous patient beds and in another configuration the floor area of the treatment area is reduced for transport. In some embodiments, the floor area in one configuration is at least twice as large  
30 as the floor area in another configuration.

          The trailer may have two treatment areas and a partition for controlling access between the treatment areas. In particular, one treatment area is adapted

for providing general care and monitoring for a number of patients and the other treatment area is for providing surgical care for at least one patient. The trailer may also have one or more doors for controlling access in and out the trailer. The trailer should have a generator for providing power, an air filtration system for  
5 filtering the air supply in the trailer, one or more light sources, a compressed air supply, a liquid oxygen supply, a heating source, and/or a cooling source.

In another aspect of the invention, the trailer may have one or more slide outs. The slide out or slide outs have more than one position allowing for the different configurations for the treatment areas or the trailer. In one embodiment,  
10 the trailer has three slide outs. The combination of two of the slide outs defines one treatment area that is capable of supporting numerous patient beds when the slide outs are in an expanded position. For example, the treatment area may have twelve patient beds. The third slide out defines another treatment area capable of supporting a plurality of operating tables. For example, this treatment area may  
15 have two operating tables. The trailer of the present invention may also have a plurality of hydraulic rams for moving the slide outs between positions.

The present invention has several advantages. As shown in the illustrated embodiment, the present invention provides a trailer that is easily transported. The slide outs of the trailer allow the trailer to quickly expand to a medical facility  
20 with a robust floor area to treat several patients. The medical facility is capable of treating a wide range of conditions or injuries including, but not limited to, operative procedures required for live-saving hemorrhage control, emergent airway support, advanced life support for cardiac arrest, post-resuscitation and critical care. If necessary, the awning system provides an effective way of adding  
25 additional capacity. The use of additional trailers allows for the mobile medical facility to carry a large cache of supply and equipment. The mobile medical facility is capable of being completely self-sufficient and may include generator power, running portable water, biohazardous waste disposal, lighting, heating, air conditioning and HEPA air filtration. The mobile medical facility has application  
30 in a number of different environments. In the event of terrorist incident involving a weapon of mass destruction, the mobile medical facility can be brought to the scene to either ease the burden on the local medical facilities or be used to treat

patients on scene if the medical facilities become overwhelmed or destroyed. The facility may also be deployed to a shelter to provide comprehensive medical care for isolated or quarantined patients should an infectious disease outbreak occur.

5 BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

Figure 1 is a perspective view of one embodiment of the present invention,  
10 wherein the trailer is in a first configuration for transport;

Figure 2 is a side view of the embodiment in Figure 1;

Figure 3 is another perspective view of the present invention from the rear of the trailer wherein the trailer is in a second and expanded configuration;

Figure 4 is a perspective view of a remote control device for moving the  
15 trailer between configurations;

Figure 5 is a view of the interior of the trailer from the top wherein the trailer is in the second configuration;

Figure 6 is the same view of Figure 5 wherein the trailer is in the first configuration;

20 Figure 7 is a side view of the interior of the driver side of the trailer taken along line 7-7 of Figure 5;

Figure 8 is a side view of the interior of the passenger side of the trailer taken along line 8-8 of Figure 5;

Figure 9 is a view of the bottom of the trailer from the top wherein the  
25 trailer is in the second and expanded configuration;

Figure 10 is a rear view of the trailer taken along line 10-10 of Figure 9;

Figure 11 is an expanded view of a cantilever beam and sleeve that is shown in Figure 10;

Figure 12 is an expanded view of a roller area on the bottom of a side end  
30 that is shown in Figure 10;

Figure 13 is a rear view of the trailer taken along line 13-13 of Figure 9;

Figure 14 is a cut-out perspective view of the bottom of floor sections;

Figure 15A is a rear view of Figure 13 wherein the slide outs are between the first and second configuration;

Figure 15B is a rear view of Figure 13 wherein the slide outs are in the first or retracted configuration;

5        Figure 16 is a cut-out perspective view of the area between the first treatment area and the second treatment area;

Figure 17 is another view of Figure 16 taken along line 17-17 of Figure 16;

Figure 18 is view of the ramp between treatment areas taken along line 18-18 of Figure 16;

10       Figure 19 is an expanded view of the locking mechanism of the ramp shown in Figure 18;

Figure 20 is a rear view of the trailer taken along line 20-20 of Figure 9 wherein the slide out for the second treatment area is expanded to the second configuration;

15       Figure 20A is cut-out side view of the floor of the slide out in Figure 20 when expanded;

Figure 21 is a cut-out perspective view of the floor of the slide out in Figure 20 when expanded;

20       Figure 22A is a rear view of the trailer taken along line 20-20 of Figure 9 wherein the slide out for the treatment area is between the first and second configuration;

Figure 22B is a rear view of the trailer taken along line 20-20 of Figure 9 wherein the slide out for the treat is in the first or retracted configuration;

25       Figure 23 is a rear perspective view of the first treatment area of the trailer in the second configuration;

Figure 24 is a perspective view of the second treatment area of the trailer in the second configuration;

Figure 25 is a perspective view of the awning system and trailer of the present invention; and

30       Figure 26 is a cross-sectional view of Figure 25.

## DETAILED DESCRIPTION OF THE INVENTION

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, the present invention may be embodied in  
5 many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

The present invention provides a mobile medical facility 10 capable of  
10 being transported over roadways and treating a plurality of patients suffering from a range of conditions or injuries. In general, and as shown in Figures 1 and 2, the mobile medical facility 10 includes a trailer 11. The trailer 11 has at least a first and second configuration. In the first configuration, the outer size and shape of the trailer 11 is configured to allow for the easy transportation of the trailer 11  
15 preferably by a tractor 12 over roadways. In the second configuration, the trailer 11 is configured to provide a large enough floor area to support the treatment of a plurality of patients.

More specifically, in the first configuration the outer shape of trailer 11 is generally rectangular and includes two substantially planar and opposing side  
20 walls 20, 21 extending between a first end 22 and a second end 23, a roof surface 24 and an undersurface 25. Although the size and shape of the trailer 11 in the first configuration may vary between embodiments, it is preferable that the size and shape of the trailer 11 are configured to allow the passage of the trailer 11 through the common limitations found on the public highways such as the width  
25 and height of bridges and tunnels. For example and not as a limitation, the trailer 11 may be approximately 53 feet long, 8 feet wide, and 13 feet tall in the first configuration and define a first floor area that is approximately 422 square feet.

In the second configuration, the trailer 11 is expanded and provides additional floor area capable of supporting a plurality of patient treatment bays  
30 120. The trailer 11 is expanded by the use of at least one or more slide outs. Although the present invention may employ a various number of slide outs, the trailer 11 in the illustrated embodiment has three slides outs 30, 40, 50. Referring

to Figures 1 and 2, two slide outs 30, 40 are on the passenger side of the trailer 11 and one slide out 50 is on the driver side. For example purposes and not as limitation, the trailer's floor area in the second configuration, referred to herein as the second floor area, may be approximately 924 square feet.

5           Each of the slide outs 30, 40, 50 generally includes an outer wall 31, 41, 51, two side ends 32, 33, 42, 43, 52, 53, and a ceiling 34, 44, 54. Each slide out 30, 40, 50 is configured to extend in and out of an opening in one of the side walls 20, 21 of the trailer 11. In particular, in the first configuration and as shown in Figure 1 and 2, the outer wall 31, 41, 51 of a slide out 30, 40, 50 may be  
10 substantially planar with one of the side walls 20, 21 of the trailer 11 and the side ends 32, 33, 42, 43, 52, 53, and ceiling 34, 44, 54 of that slide out 30, 40, 50 is substantially contained between the side walls 20, 21 of the trailer 11. In the second configuration and as shown in Figure 5, the outer wall 31, 41, 51 of each slide out 30, 40, 50 may extend outwardly from the side wall 20, 21 of the trailer  
15 11. By extending one of more of the slide outs 30, 40, 50, the trailer 11 expands its floor area. Each slide out 30, 40, 50 defines part of a treatment area. For example, the two larger and opposing slide outs 40, 50 of the illustrated embodiment when fully extended or deployed together form part of a first treatment area as further described below. The third slide out 30 nearest the  
20 forward end 22 of the trailer 11 as shown in Figures 1 and 5 when expanded forms part of a second treatment area as further described below. For example purposes only and not as a limitation, the floor area of the first treatment area may be approximately 765 square feet and the floor area of the second treatment area may be approximately 137 square feet.

25           In general, the side ends 32, 33, 42, 43, 52, 53 of the slide outs 30, 40, 50 are substantially perpendicular to the side walls 20, 21 of the trailer 11. In the illustrated embodiment and as shown in Figure 10 and 12, one or more rollers 57 may be affixed to the bottom of each side end 32, 33, 42, 43, 52, 53. The rollers 57 facilitate the sliding of the side end 32, 33, 42, 43, 52, 53 over a floor 85 of the  
30 trailer 11 when the slide out 30, 40, 50 is moving between configurations.

At the distal edge away from the outer wall 31, 41, 51, the side ends 32, 33, 42, 43, 52, 53 and the ceiling 34, 44, 54 of each slide out 30, 40, 50 may a

sealing flange 35, 45, 55 as shown in Figures 5, 10 and 20. The sealing flange 35, 45, 55 extends generally perpendicular from the ceiling 34, 44, 54 and side ends 32, 33, 42, 43, 52, 53 and generally parallel with the side walls 20, 21 of the trailer 11. The sealing flange 35, 45, 55 facilitates the sealing of the trailer 11 when the  
5 trailer 11 is in the second or expanded configuration.

Advantageously, the side ends 42, 43, 52, 53 of the two opposing and larger slide outs 40, 50 are positioned to offset one another to allow these two slide outs 40, 50 to be substantially contained between the side walls 20, 21 of the trailer 11 at the same time. This is best seen in Figures 5 and 6. Similarly, the  
10 ceilings 44, 54 of these two slide outs 40, 50 are positioned to offset one another to allow both slide outs 40, 50 to be in a retracted position for the first configuration without interference from the other. This is best seen in Figures 15A and 15B.

In another aspect of the present invention, the trailer 11 also includes a  
15 floor 85 having several sections. The sections are adjustable to accommodate the moving of the slide outs 30, 40, 50 between configurations. For example, the floor area extending between the two outer walls 41, 51 of the two opposing and larger slide outs 40, 50 have seven sections, four of which fold up when these two slide outs 40, 50 are in the first configuration. In particular and as best seen in  
20 Figure 13 through 15B, two sections 86 of the floor 85 on either side of the trailer 11 fold up to approximately 90 degrees in the first configuration. These two sections 86 flatten out with the movement of the slide outs 40, 50 to the second configuration.

Referring to Figure 14, a plurality of latitudinal supports 88 is attached to  
25 each folding floor section 86. Each latitudinal support 88 has two outer ends, one end adjacent to a non-folding floor section 89a, 89b and one end adjacent to the another folding floor section 86. A U-shaped bracket 91 connects the end adjacent to the non-folding floor section 89a, 89b to that non-folding floor section 89a, 89b. The U-shaped bracket 91 allows that folding floor section 86 to rotate  
30 or fold upwardly and substantially perpendicular to that non-folding section 89a, 89b without interference from that non-folding floor section 89a, 89b. A pair of stationary gears 92 is affixed to the other end of the latitudinal support 88 adjacent

to another folding floor section 86. This pair of stationary gears 92 engages a similar pair of gear 92 that corresponds to the adjacent folding floor section 86. When the slide out 40, 50 is moved inward, the teeth on the gears 92 facilitate the rotating or folding of these two floor sections 86. In order to inhibit the over-  
5 extension of the floor sections 86 in the second configuration wire cables 93 may be affixed between the folding floor sections 86 as shown in Figure 14.

The floor area between the outer wall 31 of the third slide out 30 and the far side wall 20 of the trailer 11 may be configured differently than the floor area between the two larger slide outs 40, 50. For example, this floor area in general  
10 may be elevated compared to the rest of the floor in order to accommodate the tractor 12 that may pull the trailer 11. Also, as best seen in Figures 20 through 22B, the floor area may have only three floor sections of which one section 95 rotates or folds. Multiple pairings of substantially parallel members 97 are attached to the underside of the folding floor section 95, as shown in Figure 21.  
15 One end of each member 97 is attached by a pivotal bracket 98 to a longitudinal support 100 that is attached to the underside of the non-folding floor section 96a adjacent the outer wall 31 of the slide out 30. A plurality of struts 99 is attached to the non-folding floor section 96b distal from the outer wall 31 of the slide out 30 and the parallel members 97. In particular, each strut 99 has a first end 101  
20 and a second end 102. The first strut end 101 is rotatably attached to the non-folding floor 96b section via a bracket mounted to a longitudinal support 103 attached to that non-folding floor section 96b. The second strut end 102 is rotatably attached to a rod 104 that is supported by a pair of the parallel members 97. When the slide out 30 moves inward the folding floor section 95 rotates about  
25 the second strut end 102 and the strut 99 rotates about its first end 101 as shown in Figure 22A.

Rotating or folding one or more floor sections is only one manner in which to provide a floor for the trailer 11 and thus the treatment areas. For example, portions of the floors may slide over each other rather than rotate. However, the  
30 folding floor sections are preferred. Rotating floor length 90 degrees is an effective method of compacting that overall floor length for transportation. The folding sections allow for the floor area of each treatment area to be on one level



when extended. Also, the non-folded floor sections provide space that can maintain or support equipment or fixtures in both the first and second configuration. For example, the center non-folding floor section 89b between the two larger slide outs 40, 50 may have one or more medical personnel stations 119  
5 consisting of a desk structure with storage capacity and a work surface. The desk structure or structures may remain in place even when the floor sections are folded up. Similarly the non-folding floor sections adjacent to the outer walls 88a, 96a allow for cabinetry for storage 130 and other equipment to run along the outer walls 31, 41, 51 without requiring their removing when the floor sections are  
10 folded up.

As shown in Figure 9, the trailer 11 may include a plurality of hydraulic rams 60 for moving the slide outs 30, 40, 50 between configurations or positions. Each ram 60 comprises a piston 61 and a cylinder 62 in which the piston 61 moves through a gland at one end. Each cylinder 62 is located between the center  
15 and non-folding floor section 89b, 96b and the undersurface 25 of the trailer 11. A distal end 63 of the piston 61 is affixed to an outer wall 31, 41, 51 of a slide out 30, 40, 50 underneath the floor 85. When the piston 61 is pushed out of the cylinder 62 by the hydraulic pressure, the piston 61 pushes out the slide out 30, 40, 50. In some embodiments, the operations of the rams 60 may be controlled  
20 remotely by control device 65, such as the one shown in Figure 4.

Although the illustrated embodiment employs hydraulic rams 60 to move the slide outs 30, 40, 50 between the first and second configurations, one in the art would appreciate the numerous methods and devices that may be included in the present invention to move the slide outs 30, 40, 50. For example, the slide outs  
25 30, 40, 50 may be moved between configurations with a gear system such as a rack and pinion assembly driven by either hand cranks and/or electric motors.

The trailer 11 may also include a plurality of structural members for supporting the slide outs 30, 40, 50 when they are deployed in the second configuration. For example purposes only and not as a limitation, cantilever  
30 beams and jack-supports may be used. More specifically, as best seen in Figures 9 through 11, the trailer 11 may have a plurality of extendable cantilever supports 70. Each support includes a sleeve 71, a beam 72, and one or more rollers 73.

The sleeve 71 is mounted underneath one of the non-folding and center floor sections 89b, 96b, generally in parallel and proximate to one of the hydraulic rams 60. The sleeve 71 is configured to contain some or all of the entire beam 72. One end 74 of the beam 72 is affixed to the outer wall 31, 41, 51 of a slide out 30, 40, 50 underneath the floor 85. When the slide out 30, 40, 50 extends out and away from the center of the trailer 11 the beam 72 extends out with it and slides out of the sleeve 71. Conversely, when the slide out 30, 40, 50 retracts back to the first configuration the beam 72 slides back into and along the sleeve 71. The rollers 73 are mounted on the sleeve 71 and engage the beam 72 through openings 75 in the sleeve 71 to facilitate the movement of the beam 72 in and out of the sleeve 71.

The trailer 11 may also include a plurality of jack supports 80 for additional support to the slide outs 30, 40, 50 when extended. As shown in Figure 10 and 20, the jack supports 80 are placed proximately underneath the outer wall 31, 41, 51 of the slide outs 30, 40, 50 and are configured to engage the end 74 of a beam 72. One in the art would appreciate the numerous jacks that may be employed with this invention including but not limited to hydraulic or scissors-type.

As stated above, when the two larger slide outs 40, 50 are fully deployed they define part of a first treatment area intended for serious ill or injured victims who may require definitive care or constant monitoring. The third slide out when deployed defines a second treatment area that functions as an operating room.

The first treatment area provides for a plurality of patient treatment bays 120 as shown in Figure 5 and 23. Some of the patient bays 120 may be designated for general care and others for critical care. For example, the bays 120a closest to the second treatment area may be considered for patients in need of critical care. Each bay 120 may include a patient bed 121 or chair 123 and additional equipment or hardware. The patient bed 121 may be the typical "medical office" type that can be seated firmly on the floor 85 and include a thick mattress. These beds 121 also have storage drawers located under the mattress on the sides. Paper rolls are located at the head of each bed 121 to be used as sheets. The utility of this is important for this can be changed quickly between patients, it is easily disposed of, and it negates the requirement for linen. Individual patient treatment

bays 120 may be segregated for privacy by dividing curtains 122. The second treatment area functions as a operating room and may provide one or more operating stations 125 as shown in Figure 24. Each station 125 may include an operating room table 126 and an additional equipment or hardware, including adjustable overhead lighting 127.

In the illustrated embodiment the first treatment area supports twelve patient treatment bays 120 of which four are designated for critical care 120a and one is configured to be a dental care station 120b. And the second treatment area supports two operating stations 125. However one in the art would appreciate the numerous variations this present invention may employ regarding the number, combinations, and designations of the treatment bays 120 and operating stations 125.

The general area between the first and second treatment areas may provide additional storage areas 140 and one or more sinks 141 as shown in Figure 16 and 17. In the embodiments having floors at different levels between the treatment areas, a ramp 142 may be used as illustrated to assist personnel and patients. The storage areas 140 and sink 141 may have a recess 143 configured to receive a side end 42 of one of the slide outs 40. Also, the ramp 142 may be rotatable such that it can be rotated to a general perpendicular position to avoid interfering with the side end 42 when it moves to a retracted position as shown in Figure 18. Figure 19 illustrates an example of a pin-lock mechanism 145 that may be used to hold the ramp 142 in its perpendicular position. A floor section 150 adjacent the side end 42 of the slide out 40 may be folded to compact the floor length between that floor area adjacent the side end 42 and the floor area near the sink 41 for the first configuration. This floor section 150 may be folded manually and held against the side end 42 by a hook 151 as best seen in Figure 16 and 17. The trailer 11 may also include a partition 144 near or on the top of the ramp 142 and capable of extending across the width of the trailer 11 for controlling movement between the first and second treatment area. For example purposes only and not as a limitation, the partition 144 may be a folding glass door. Also, due to the amount of storage available in this general area, in some embodiments, this area may be used as a pharmacy.

The trailer 11 may also include one or more doorways for entering and leaving. For example and as shown in Figure 3, the second end 23 of the trailer 11 may define one or more doors 111 and serve as a main entrance 110. As shown in Figures 3 and 8, a ramp 112 and/or stairs 113 may be used to assist  
5 people with reaching the entrance 110. Furthermore, as shown in Figure 7, a hydraulic lift 114 may be attached to the second end 23 to facilitate the movement of equipment in and out of the trailer 11. Additional doors may be defined by a side end 32, 33, 42, 43, 52, 53 of a slide out 30, 40, 50 or a side wall 20, 21 of the trailer 11. According to the illustrated embodiment, a second door 115 is located  
10 in a side end 52 of the only slide out 50 on the driver side. And a third door 116 is located on the driver's side wall 20 opposite from the smaller slide out 30. These additional doors 115, 116 may also use ramps 112 or stairs 113 as best shown in Figure 5.

The trailer 11 may also include one or more hydraulic legs 117 for leveling  
15 and/or stabilizing the trailer 11 and thus the floor 85 during the second configuration. According to the illustrated embodiment the trailer 11 has four hydraulic legs 117 located proximate to each corner of the trailer 11 and two additional legs 117 more to the center of the trailer 11 along the side walls 20, 21. In operation, each leg 117 extends down from the undersurface 25 and engages  
20 the ground. In order to level the trailer 11, the legs 117 may exert different pressure against the ground to achieve the desired leveling. In some embodiments, the remote control device 65 used to operate the hydraulic rams 60 and shown in Figure 4 may also operate the hydraulic legs 117.

The trailer 11 may also include power generation, running potable water,  
25 biohazard waste disposal, lighting 162, heating, air conditioning and HEPA air filtration for the treatment areas. Furthermore, as part of air filtration, the trailer 11 may include an overpressure air system that maintains the air pressure inside the trailer 11 at a high level than the air pressure of the air outside the trailer 11 to control the flow of air into the trailer 11. As shown in Figures 7, 8, 23, and 24,  
30 supplies may be stored in overhead cabinets and/or fixed cabinets 130 in each treatment bay 120 and each operating station 125. Monitoring and resuscitation equipment is fixed mounted in the appropriate treatment areas. The layouts are

designed to minimize the time between setup and treatment of casualties.

Oxygen, air suction, and electricity are piped or wired to all patient treatment bays 120 and operating stations 125. Medical personnel workstations 119 are located to maximize viewing and monitoring of all patients and provide work areas for charting and other paperwork duties. Telephone and data connections are located in the medical personnel workstation 119. Computers are connected via a server mounted onboard the trailer 11.

The trailer 11 may further include a satellite communication system for providing high-speed communication for the medical facility 10. The satellite communication system may have, among other things, a satellite dish 135, a receiver/processor 136, and one or more monitors 137. In general, the communication system provides a real-time video and audio communication link between the mobile medical facility 10 and other health or government facilities such as local EMS or emergency operations centers. For example, the communication system allows for patient health records or other information to be sent to and from the mobile medical facility 10. The satellite communication system may also provide the mobile medical facility 10 with telemedicine capabilities. For example, the medical personnel in one of the operating stations 125 may communicate via a monitor 137 located on the first end 22 with remotely located medical personnel for assistance with the treatment of a patient.

Oxygen and suction ports with all piping for such may be located between an interior wall and the outer wall 31, 41, 51 of each slide out 30, 40, 50. Diagnostic instruments including but not limited to an ophthalmoscope, otoscope with speculums and dispenser, sphygmomanometer, and thermometer with probe covers may be located between patient bays 20 to service the two adjacent bays 20. Cardiac monitoring capability may be permanently mounted in the operating stations 125 and available at patient bays 120 using portable cardiac monitor/defibrillators. Having portable monitors facilitates more flexibility and allows each patient bay 120 to be potentially monitored.

Additional hardware at each patient bay 120 or operating station 125 may include cabinetry for storage 130 and intravenous line attachments for fluid resuscitation and hydration capability. The mobile medical facility 10 may also

include supply carts for storing and moving around supplies. For example, the carts may have supplies for airway support (laryngoscopes, endotracheal tubes, and alternative airway adjuncts), intravenous lines (fluids, tubing, and start kits), pharmaceutical carts, and carts for minor laceration and burn care. The treatment  
5 areas may be stocked with standard emergency care and diagnostic supplies. Additional diagnostic equipment may include a portable ultrasound machine and x-ray unit. These two machines may be entirely mobile throughout the entire trailer 11. Preferably, the x-ray apparatus only requires a minimal radiation supply so that exposure is considered minimal.

10 As shown in Figures 25 and 26, the mobile medical facility 10 may also include an awning system 155 for extending the capabilities of the medical facility 10 outside the trailer 11. The awning system 155 may include a plurality of joists 156, a plurality of columns 157, and a tent canvas 158. The joist 156 and columns 157 together form a tent-like frame around the trailer 11. The canvas 158 is  
15 placed over the frame forming an enclosed and protective area. In order to raise the height of the tent-like frame a marquee system 159 may be placed on top of the trailer 11, providing a higher anchor point for the joists 156. Although the joists 156 and columns 157 may be made from a variety of materials, aluminum is preferred due to its weight and strength. For example purposes only and not as a  
20 limitation the enclosed area may include approximately 5600 square feet.

The purpose of the awning system 155 is to provide a more controlled environment for non-emergent patients. Fluorescent light boxes are suspended from the awning framework and are connected via pre-wired electrical connections affixed to the frame. This will provide sufficient illumination for all  
25 minor patient care activities. Heating for winter operations may be provided by electric heaters that are suspended from awning framework and distributed around the perimeter of the awning.

Cooling for warm weather operations may be accomplished through the use of electric fans that circulate the air under the awning system. All air coming  
30 in to this portion may also be HEPA filtered to 0.3 microns. Portable litters may be distributed throughout the floor space beneath the awning for medical monitoring and basic treatment. Appropriate staffing may be assigned to this area.

Should a patient deteriorate, the patient may be moved to the more definitive treatment area inside the medical facility trailer 11.

When the awning system 155 is deployed, a complete patient care working environment is available. The enclosed area may be divided into two sections; one for patients categorized as a higher priority and one for lesser priority patients. Litters and litter stands may be available for those requiring such. Similar to the inside portion of the trailer 11, specialty care rolling carts will be available for the outside patient care area. Carts will include supplies for airway support, intravenous lines, and for minor laceration and burn care. The awning system 155 may include one or more entrances 160 as shown in Figure 25.

In another aspect of the invention, the mobile medical facility 10 may include one or more additional trailers. For example, in the preferred embodiment, a second trailer 165 like the one shown in Figure 3 serves as the support unit for equipment and supplies. The support unit incorporates a “two story” design that allows for maximum efficient use of storage. Larger/bulkier equipment is stored over head while smaller equipment, rolling carts, and replacement supply inventory is located on the lower level. Movement between levels is accomplished via lift gate on the rear of the trailer. Additional trailers may also serve as living or rest area for some of the medical personnel.

As shown in the illustrated embodiment, the trailer 11 is configured to be pulled by a tractor 12 and as such the trailer 11 may include two axles, each having four tires 170, and near the first and front end 22, the undersurface 25 is designed to engage the back of the tractor 12 for hauling.

The present invention has several advantages. In particular, the present invention provides a mobile medical facility 10 based on a trailer 11 that is easily transported over the roadways without requiring any extensive transportation means. The folding floors and slide outs 30, 40, 50 of the trailer 11 allow the trailer 11 to quickly expand to a medical facility with a robust floor area to treat several patients. If necessary, the awning system provides an effective way of adding additional capacity. The use of additional trailers allows for the mobile medical facility 10 to carry a large cache of supply and equipment. The mobile medical facility 10 is capable of being completely self-sufficient and may include

generator power, running portable water, biohazardous waste disposal, lighting, heating, air conditioning and HEPA air filtration.

With the capability for critical care resuscitation, the mobile medical facility 10 can handle many of the emergency medical interventions to be rendered at a local hospital emergency department. Patients who were decontaminated can be brought into this mobile emergency department or medical facility 10 and be stabilized then transferred to a hospital or treated and released. The mobile medical facility 10 can play a key role on scene should there be a need for long distance transfer of patients beyond the region or via the National Disaster Medical system out of state.

The present invention has applications in the event of a biological terrorist incident. The mobile medical facility 10 may be used to provide medical support for a mega-shelter established at one of the major public facilities (i.e., area, convention center, etc...) identified as shelter or quarantine for exposed or contagious victims. The mobile medical facility 10 may also be deployed to an airport or other reception location. Patients being off loaded from a liminary aircraft would have immediate access to a critical care treatment facility in the event their condition deteriorated during flight. Stabilization can be accomplished in advance of ground transfer to a regional receiving medical facility.

The present invention has other applications beyond terrorism to include any natural or man-made disaster that involves mass casualties that can overwhelm the capability of the local facilities to handle.

Many modifications and other embodiments of the invention set forth herein will come to mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.



THAT WHICH IS CLAIMED:

1. A mobile medical facility capable of being transported over the roadways and treating a plurality of patients suffering from a range of conditions or injuries, said medical facility comprising:
  - a trailer defining a floor area and having at least a first configuration and second configuration, wherein in the second configuration the floor area of the trailer is large enough to support a plurality of treatment bays for treating patients and in the first configuration the floor area of the trailer is reduced to allow for the transporting of the trailer.
2. The mobile medical facility according to Claim 1 further comprising a tractor for transporting the trailer.
3. The mobile medical facility according to Claim 1 further comprising an awning system for providing an extended protective area adjacent to said trailer.
4. The mobile medical facility according to Claim 1 further comprising a second trailer for storing equipment or supplies.
5. The mobile medical facility according to Claim 1 wherein the floor area in the second configuration is at least twice as large as the floor area in the first configuration.
6. The mobile medical facility according to Claim 1 wherein the floor area in the second configuration is approximately 924 square feet and the floor area in the first configuration is approximately 422 square feet.

7. A trailer for providing a patient care facility, said trailer comprising:

at least one treatment area having at least two configurations, wherein in one configuration the treatment area defines a floor area capable of supporting a plurality of patient treatment bays or operating stations and in another configuration the treatment area defines a reduced floor area for transporting the trailer.

8. The trailer according to Claim 7 wherein the floor area in one configuration is at least twice as large as the floor area in another configuration.

9. The trailer according to Claim 7 further comprising a first treatment area for providing general care and monitoring for a plurality of patients and a second treatment area for providing surgical care for at least one patient, each treatment having two configurations.

10. The trailer according to Claim 9 further comprising a partition for controlling access between the first treatment area and second treatment area.

11. The trailer according to Claim 10 further comprising at least one door for controlling access in and out of the trailer.

12. The trailer according to Claim 9 further comprising a generator for providing power to the trailer.

13. The trailer according to Claim 9 further comprising an air filtration system for filtering the air supply to the trailer.

14. The trailer according to Claim 13 wherein the air filtration system maintains the air pressure inside the trailer at a higher level than the air pressure outside the trailer.

15. The trailer according to Claim 9 further comprising at least one light source for providing light in the trailer.

5 16. The trailer according to Claim 9 further comprising at least one heating source for providing heat to the trailer.

17. The trailer according to Claim 9 further comprising at least one air conditioning source for cooling the trailer.

10 18. The trailer according to Claim 9 further comprising means for changing each treatment area between the first configuration of the treatment area and the second configuration of the treatment area.

15 19. The trailer according of Claim 9 further comprising means for supplying an air supply for treating patients.

20. The trailer according to Claim 9 further comprising a satellite communication system for providing telemedicine capability.

20 21. A mobile medical facility capable of transporting over the roadways and treating a plurality of patients suffering from a range of conditions or injuries, said medical facility comprising:

a trailer having,

at least one slide out having a first and second position,

25 a first configuration when each slide out is in its first position, said first configuration defining a first floor area,

a second configuration when each slide out is in its second position, said second configuration defining a second floor area, and

30 a floor configured to partially fold upwards when each slide out is in its first position and substantially unfold when each slide out is in its second position,

wherein the second floor area is at least twice the first floor area.

22. The mobile medical facility according to Claim 21, wherein the trailer has three slide outs.

5 23. The mobile medical facility according to Claim 22, wherein two of the slide outs, together define a treatment area capable of supporting a plurality of patient beds when the slide outs are in the second position.

24. The mobile medical facility according to Claim 23, wherein the  
10 number of patient beds in the treatment area is twelve.

25. The mobile medical facility according to Claim 24, wherein the third slide out defines a second treatment area capable of supporting a plurality of operating tables.  
15

26. The mobile medical facility according to Claim 25, wherein the number of operating tables in the second treatment area is two.

27. The mobile medical facility according to Claim 21 further  
20 comprising an awning system for providing an extended protective area adjacent to said trailer.

28. The mobile medical facility according to Claim 21 wherein said trailer is configured to be pulled by a tractor.  
25

29. The mobile medical facility according to Claim 21 further comprising a second trailer for providing a storage area.

30. The mobile medical facility according to Claim 21 further  
30 comprising a plurality of hydraulic rams for moving the at least one slide out between the first and second positions.

ABSTRACT OF THE DISCLOSURE

5       A mobile medical facility capable of treating a plurality of patients and  
being transported over the roadways without requiring extensive transporting  
means. In general the mobile medical facility includes a trailer. The trailer  
defines a floor area and has at least a first and second configuration. In the first  
configuration, the floor area is reduced to allow for transporting of the trailer over  
the public highways. In the second configuration, the floor area of the trailer is  
10   expanded and large enough to support a plurality of beds for treating patients. In  
some embodiments, the floor area in the second configuration may be at least  
twice as large as the floor area in the first configuration.

1/14

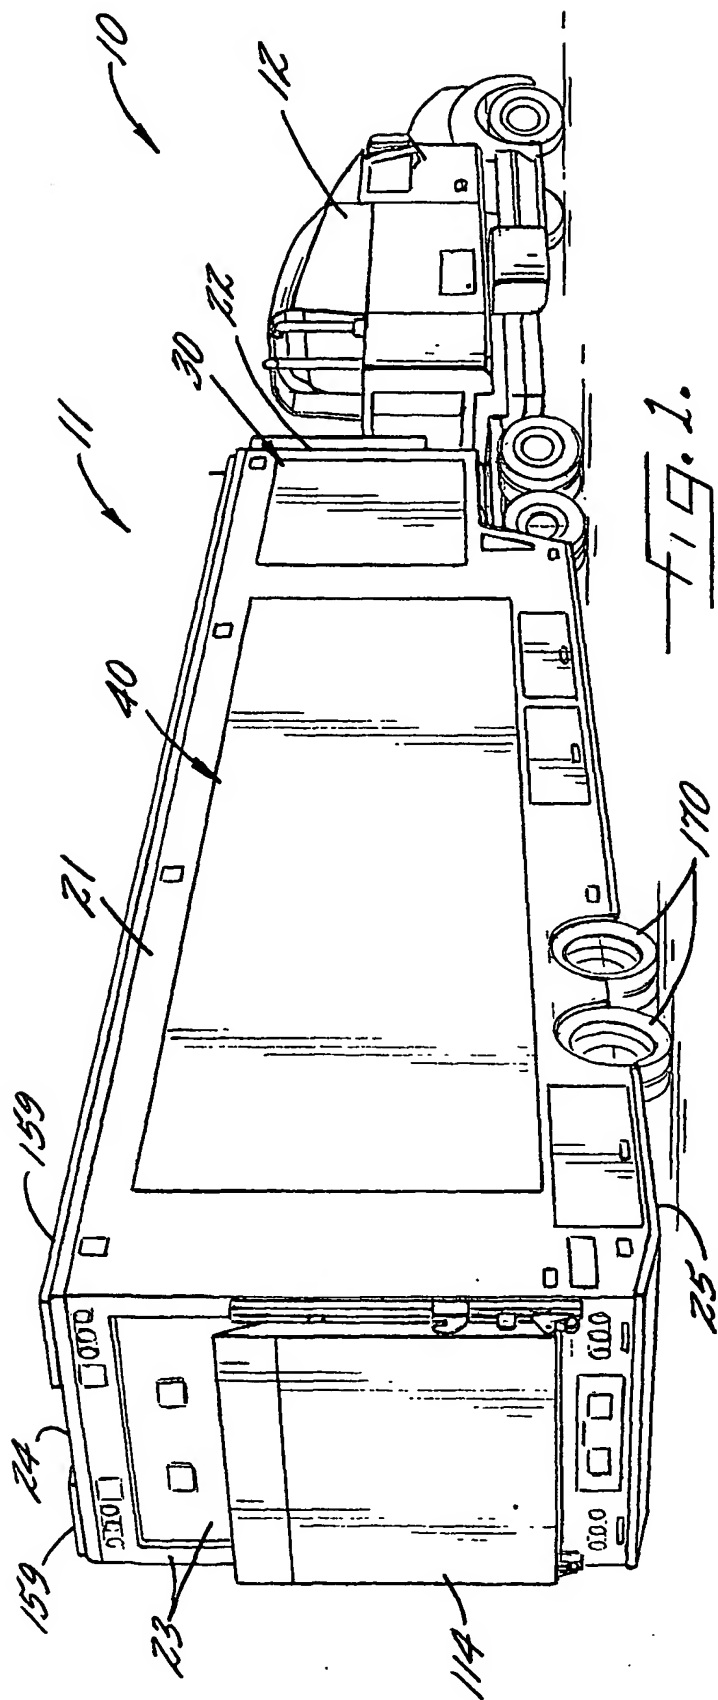


FIG. 1.






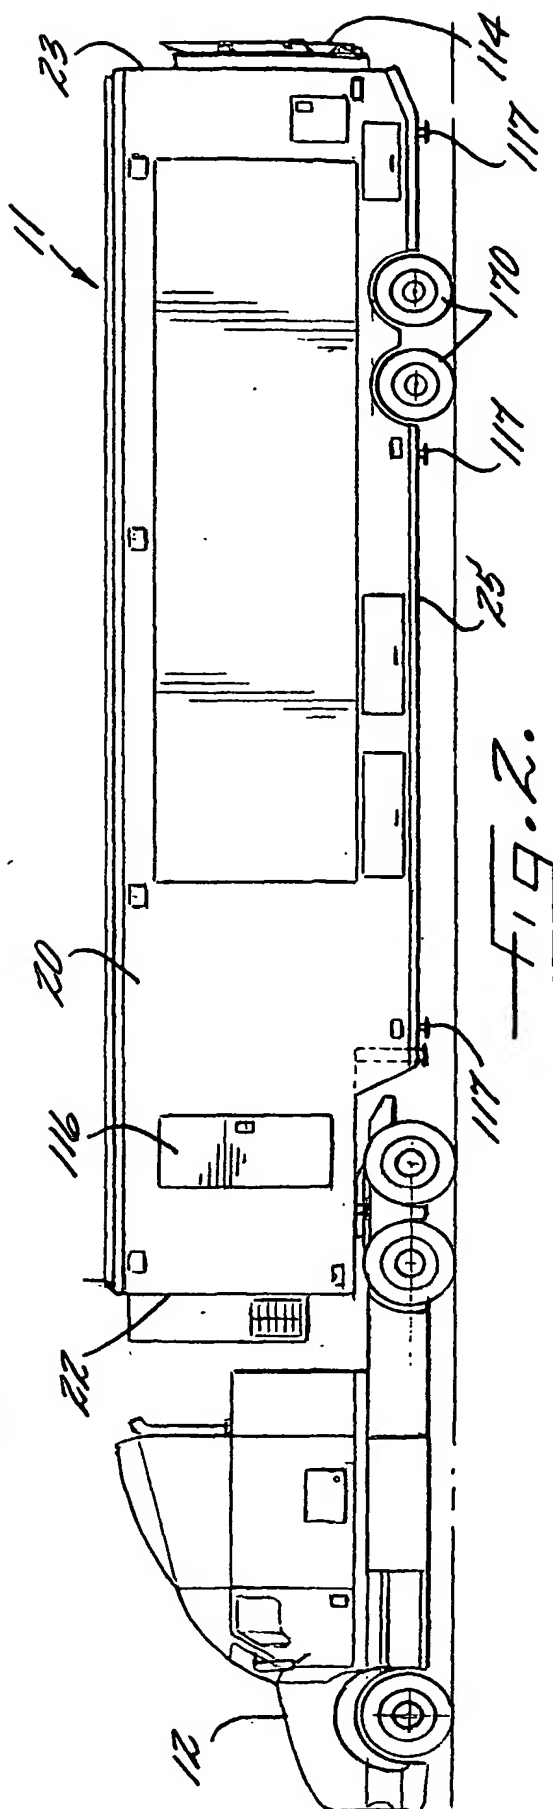



FIG. 2.

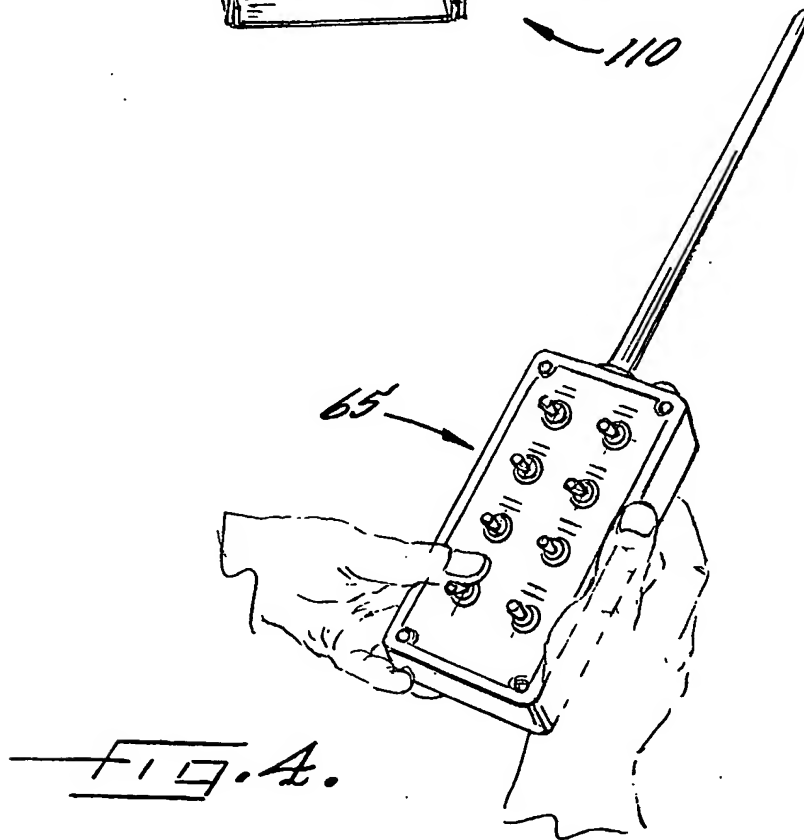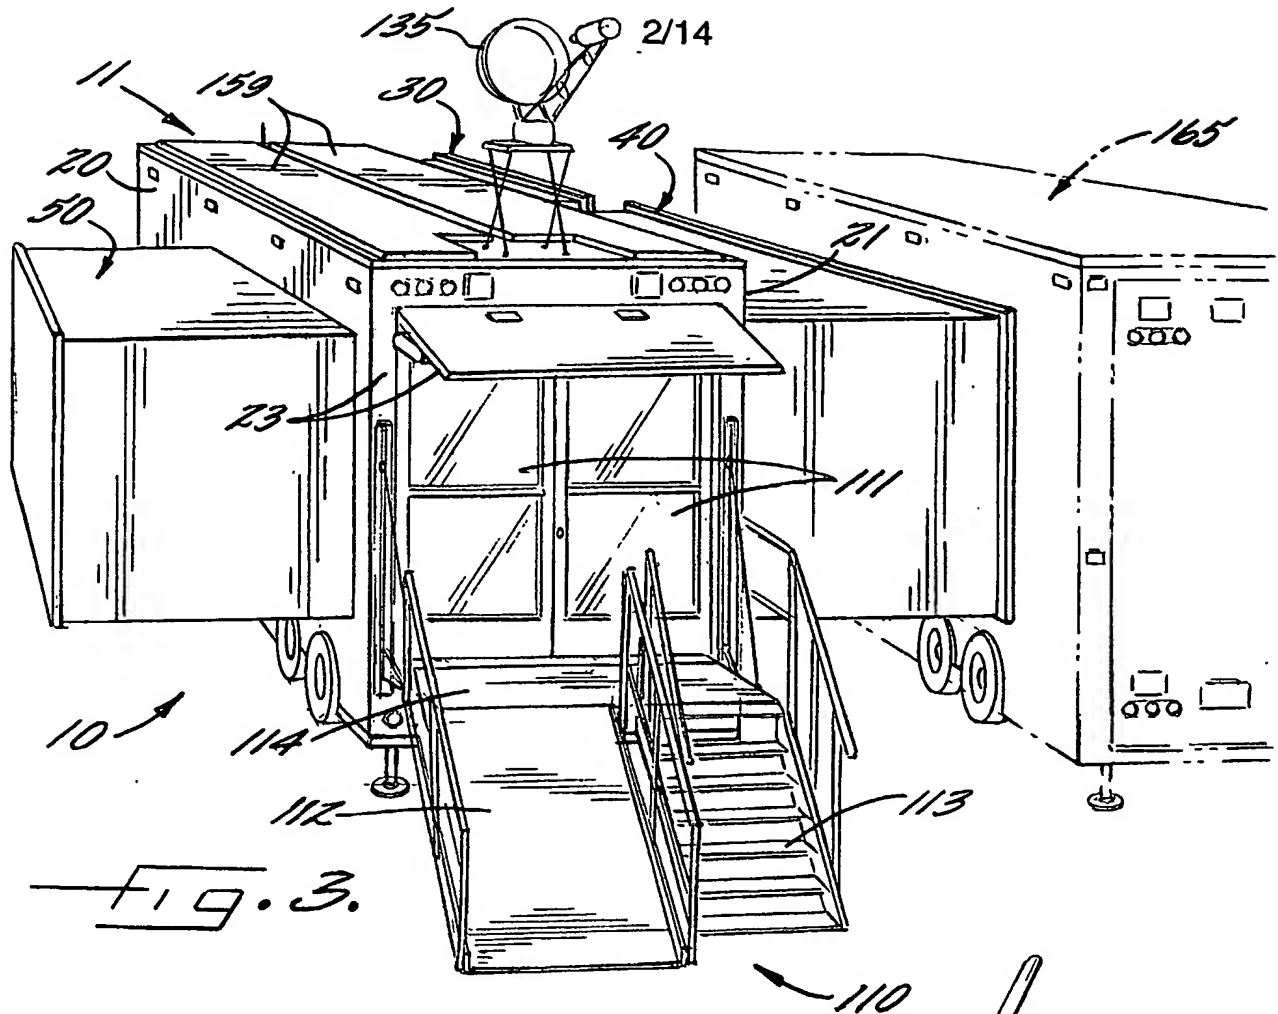

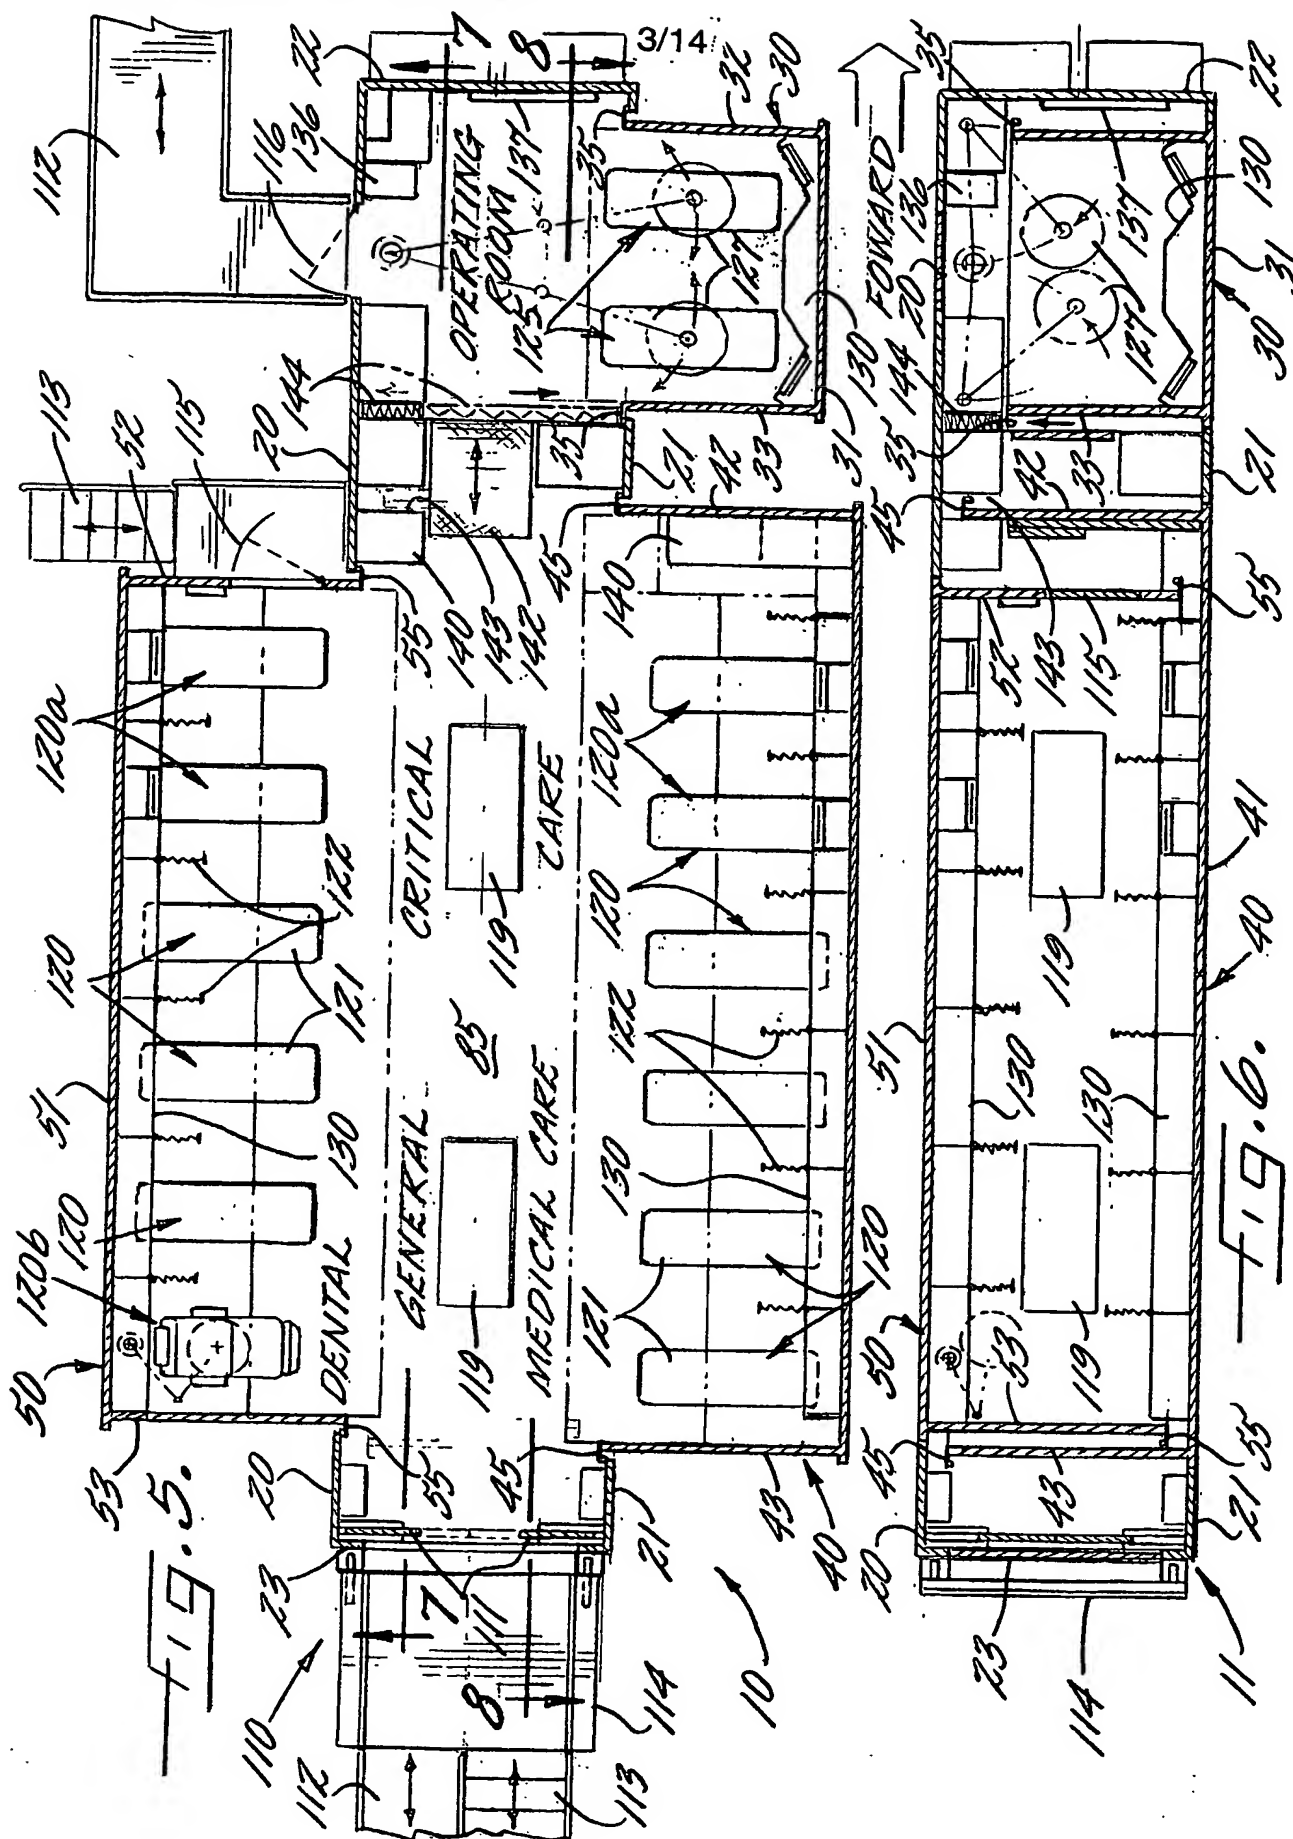

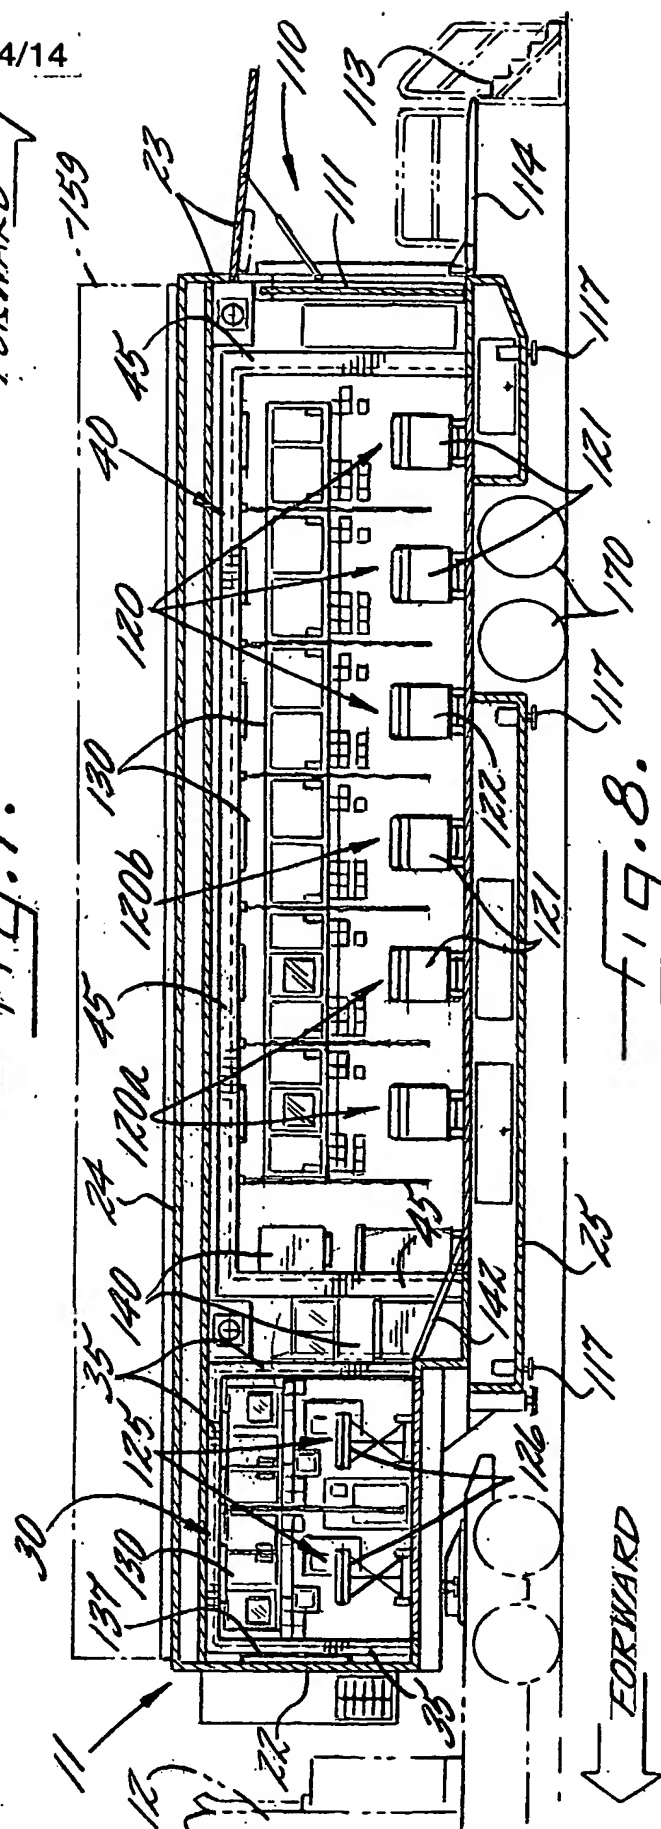

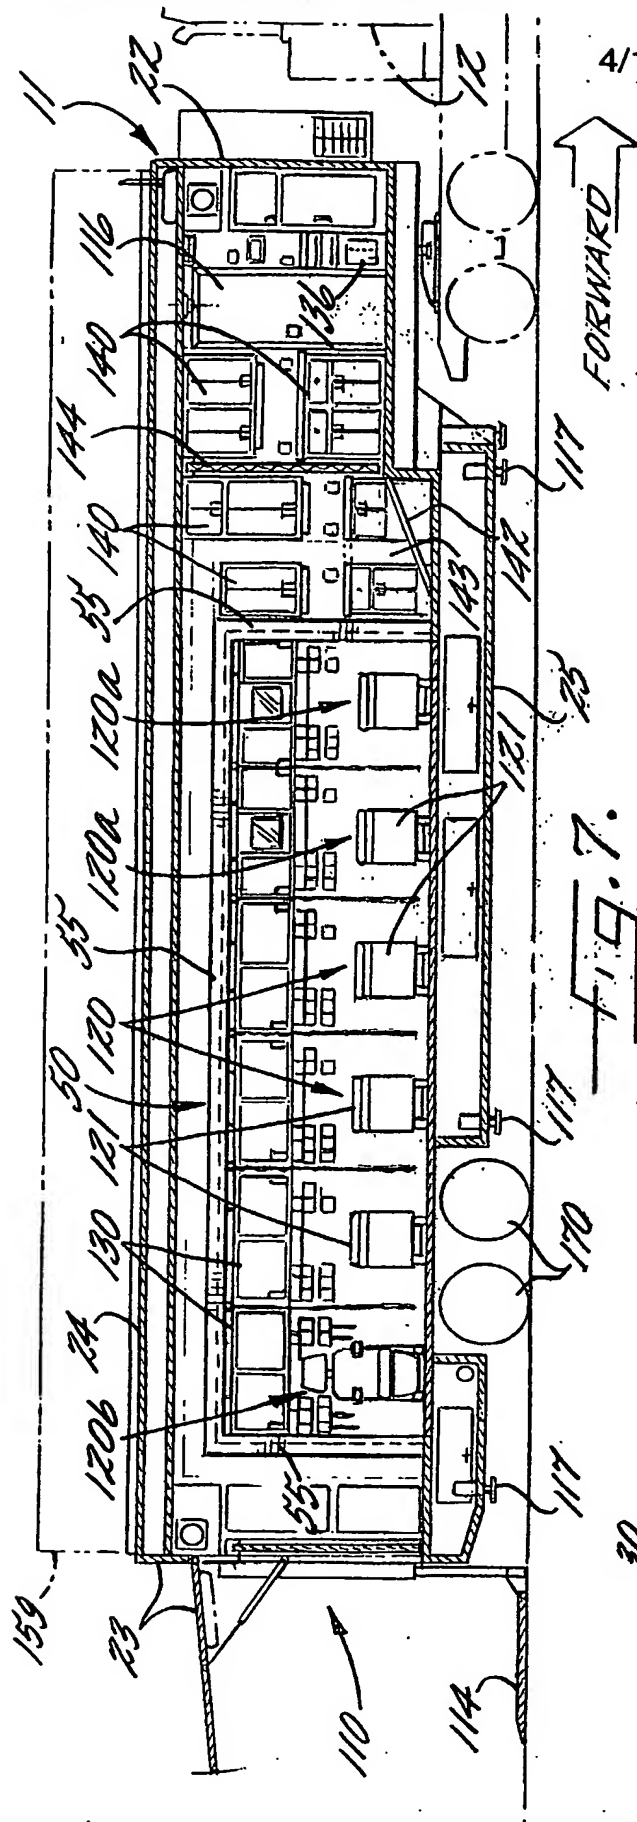

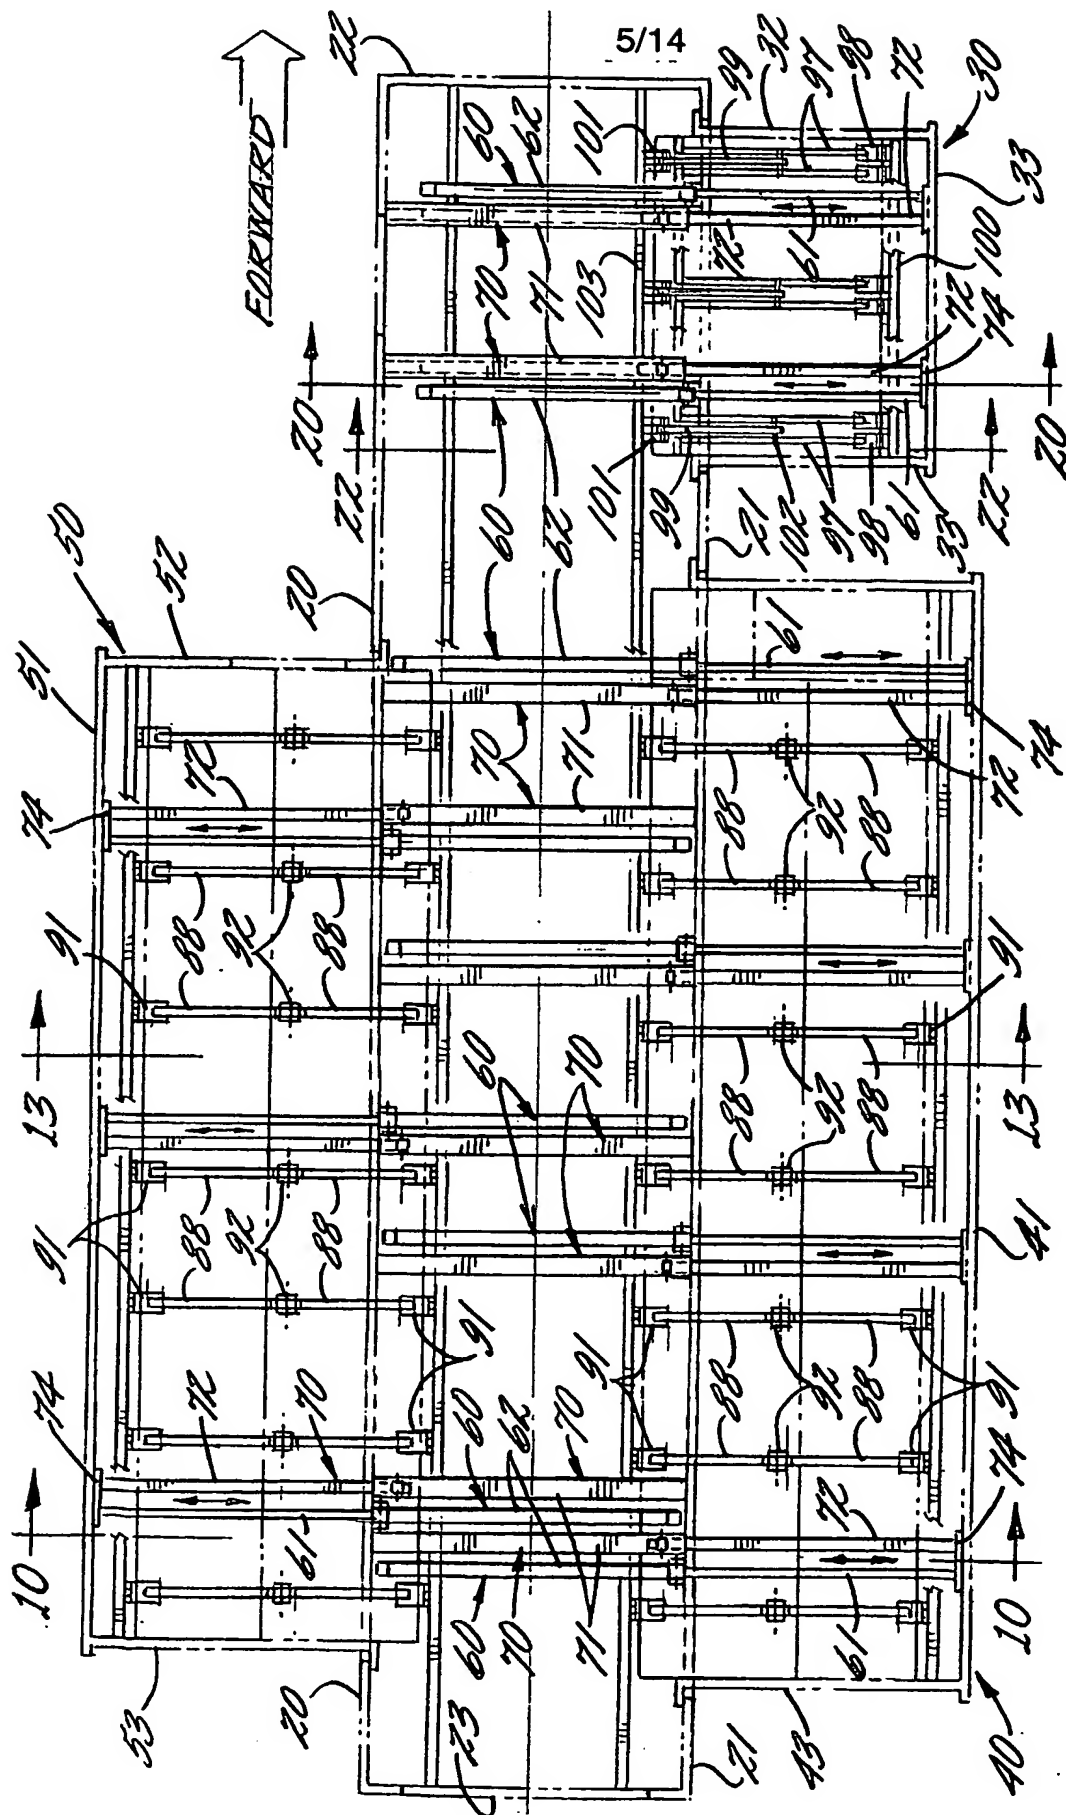
$$\overline{19.9}$$

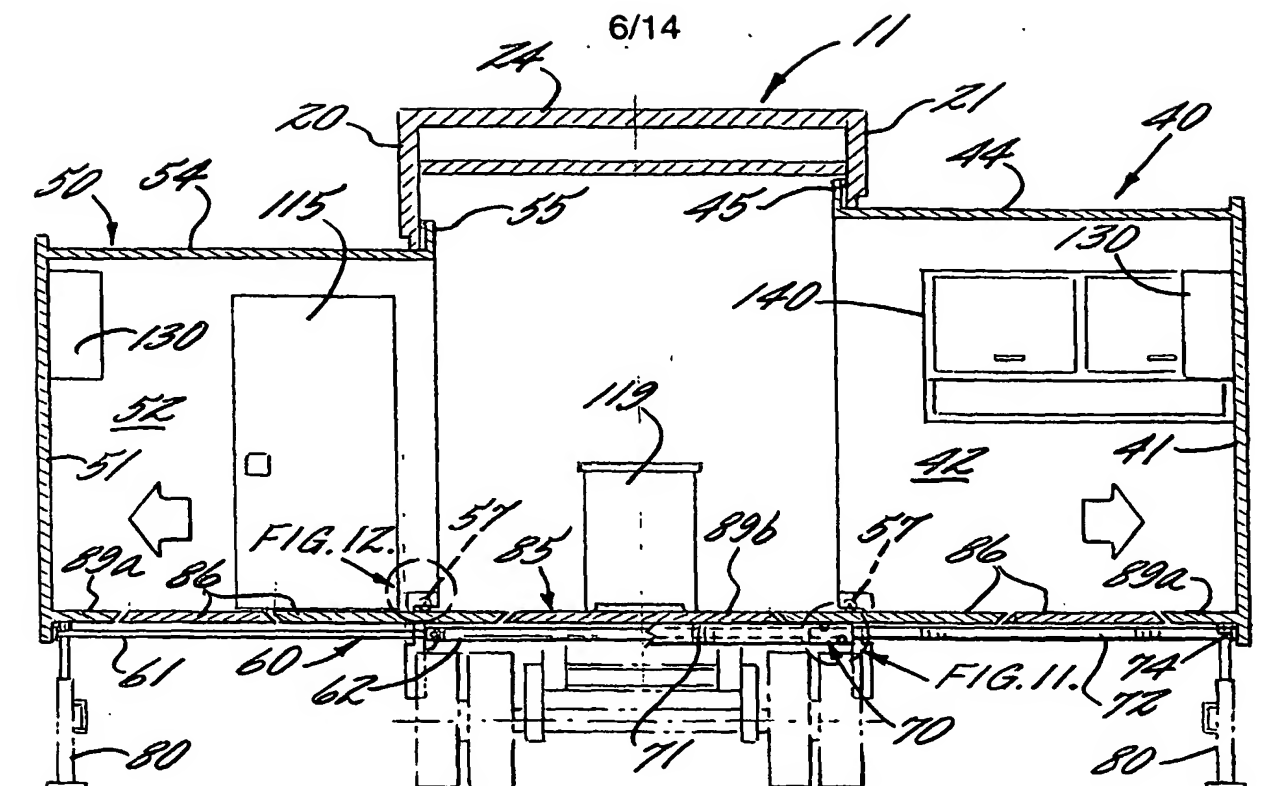


Fig. 10.

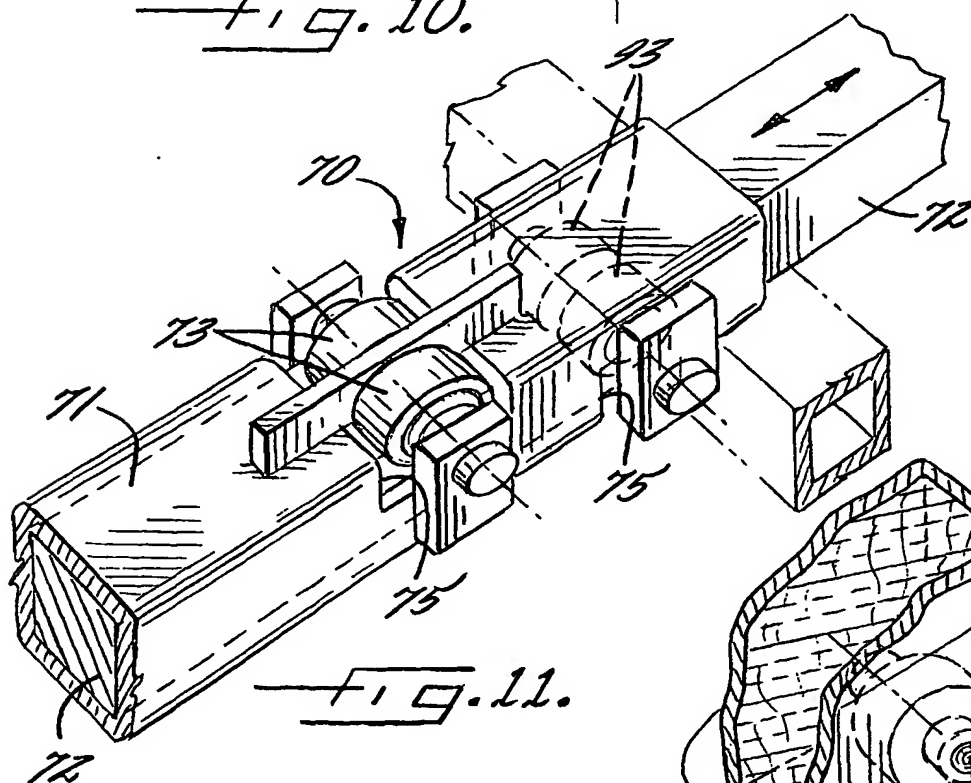


Fig. 11.

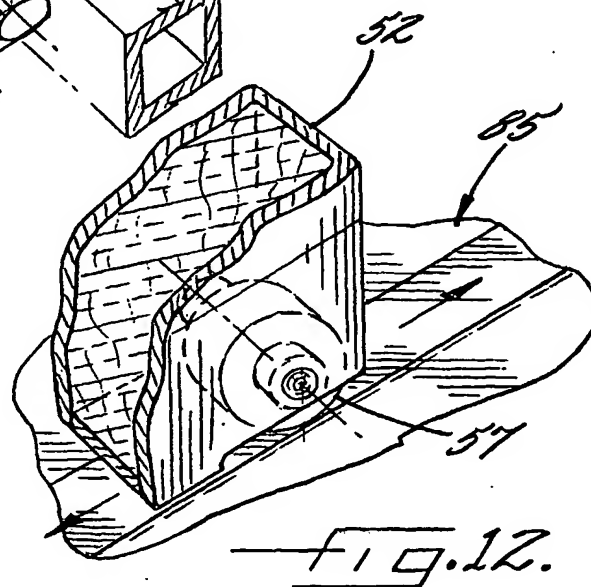


fig. 12.


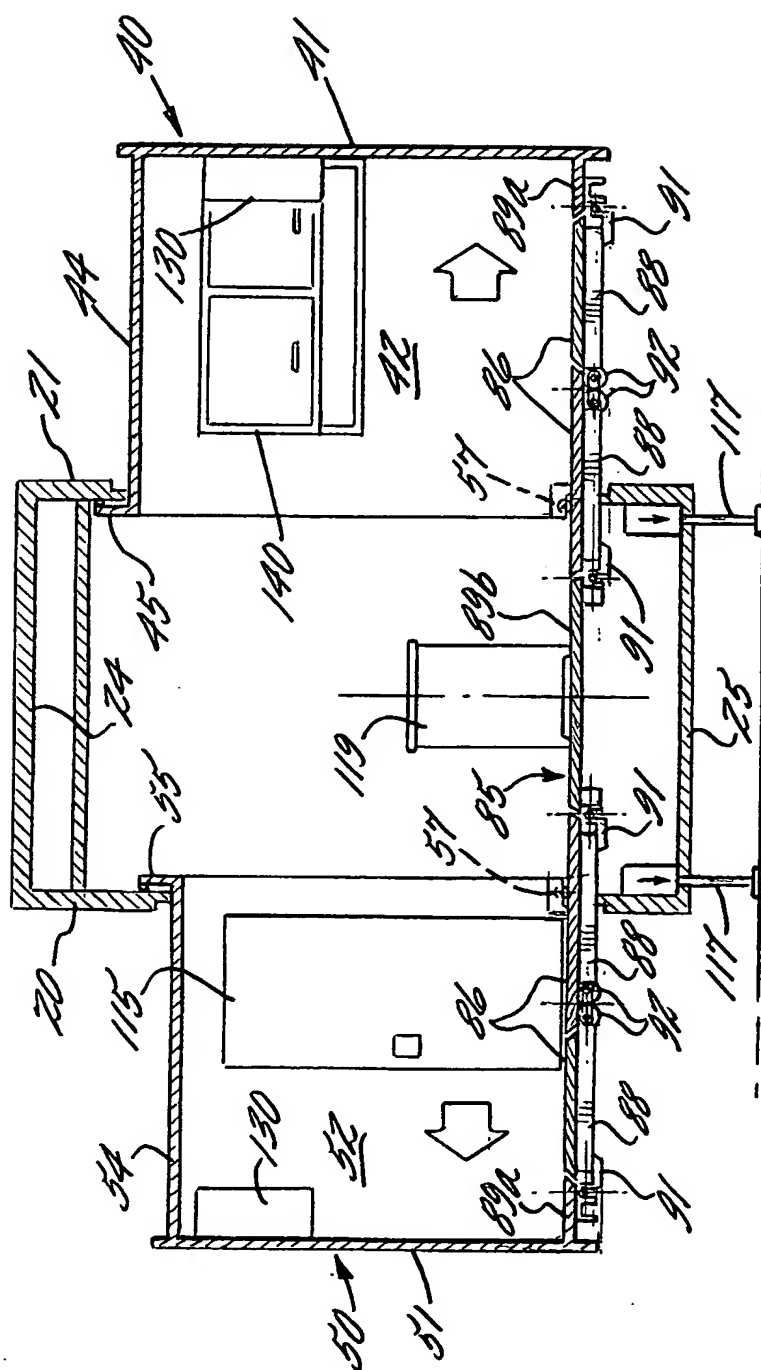


Fig. 13.

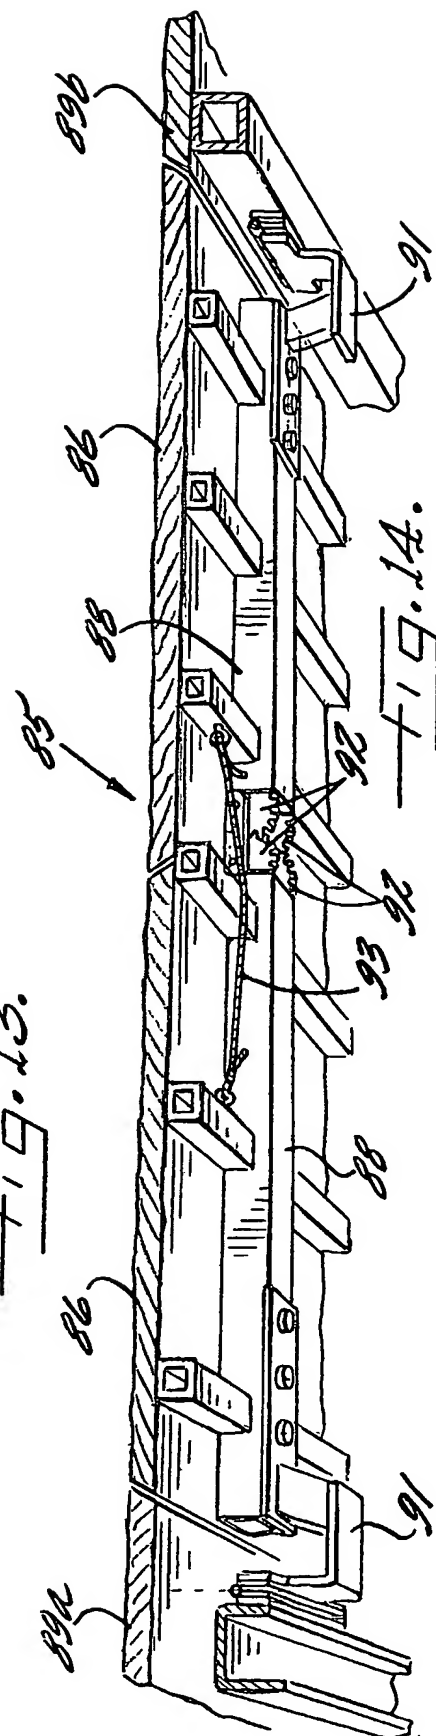

119.14.






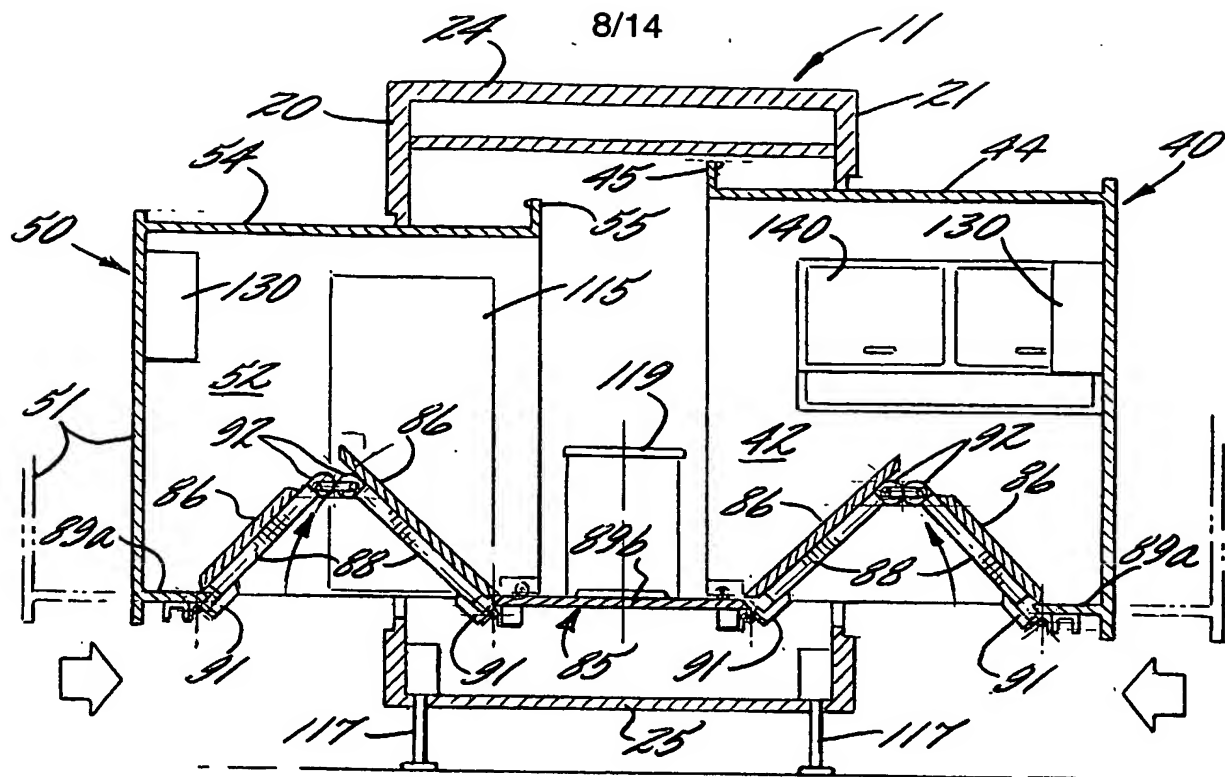





Fig. 15A.

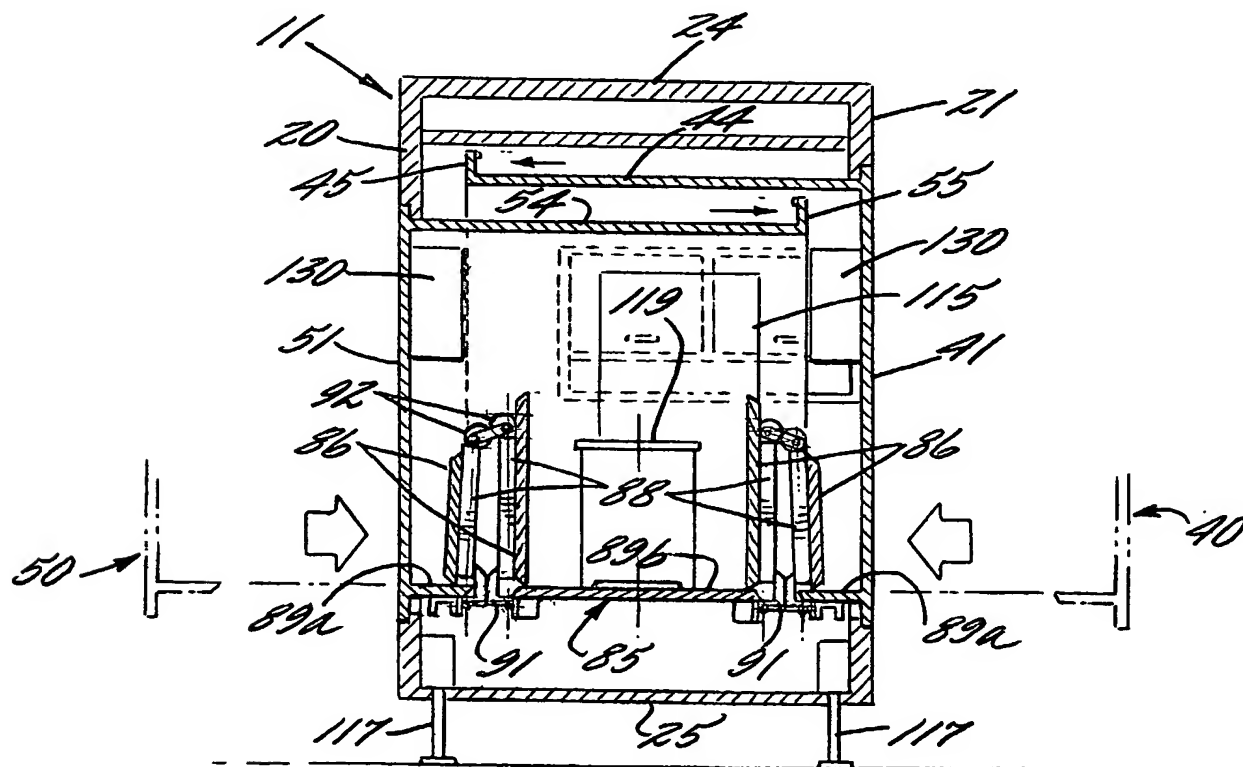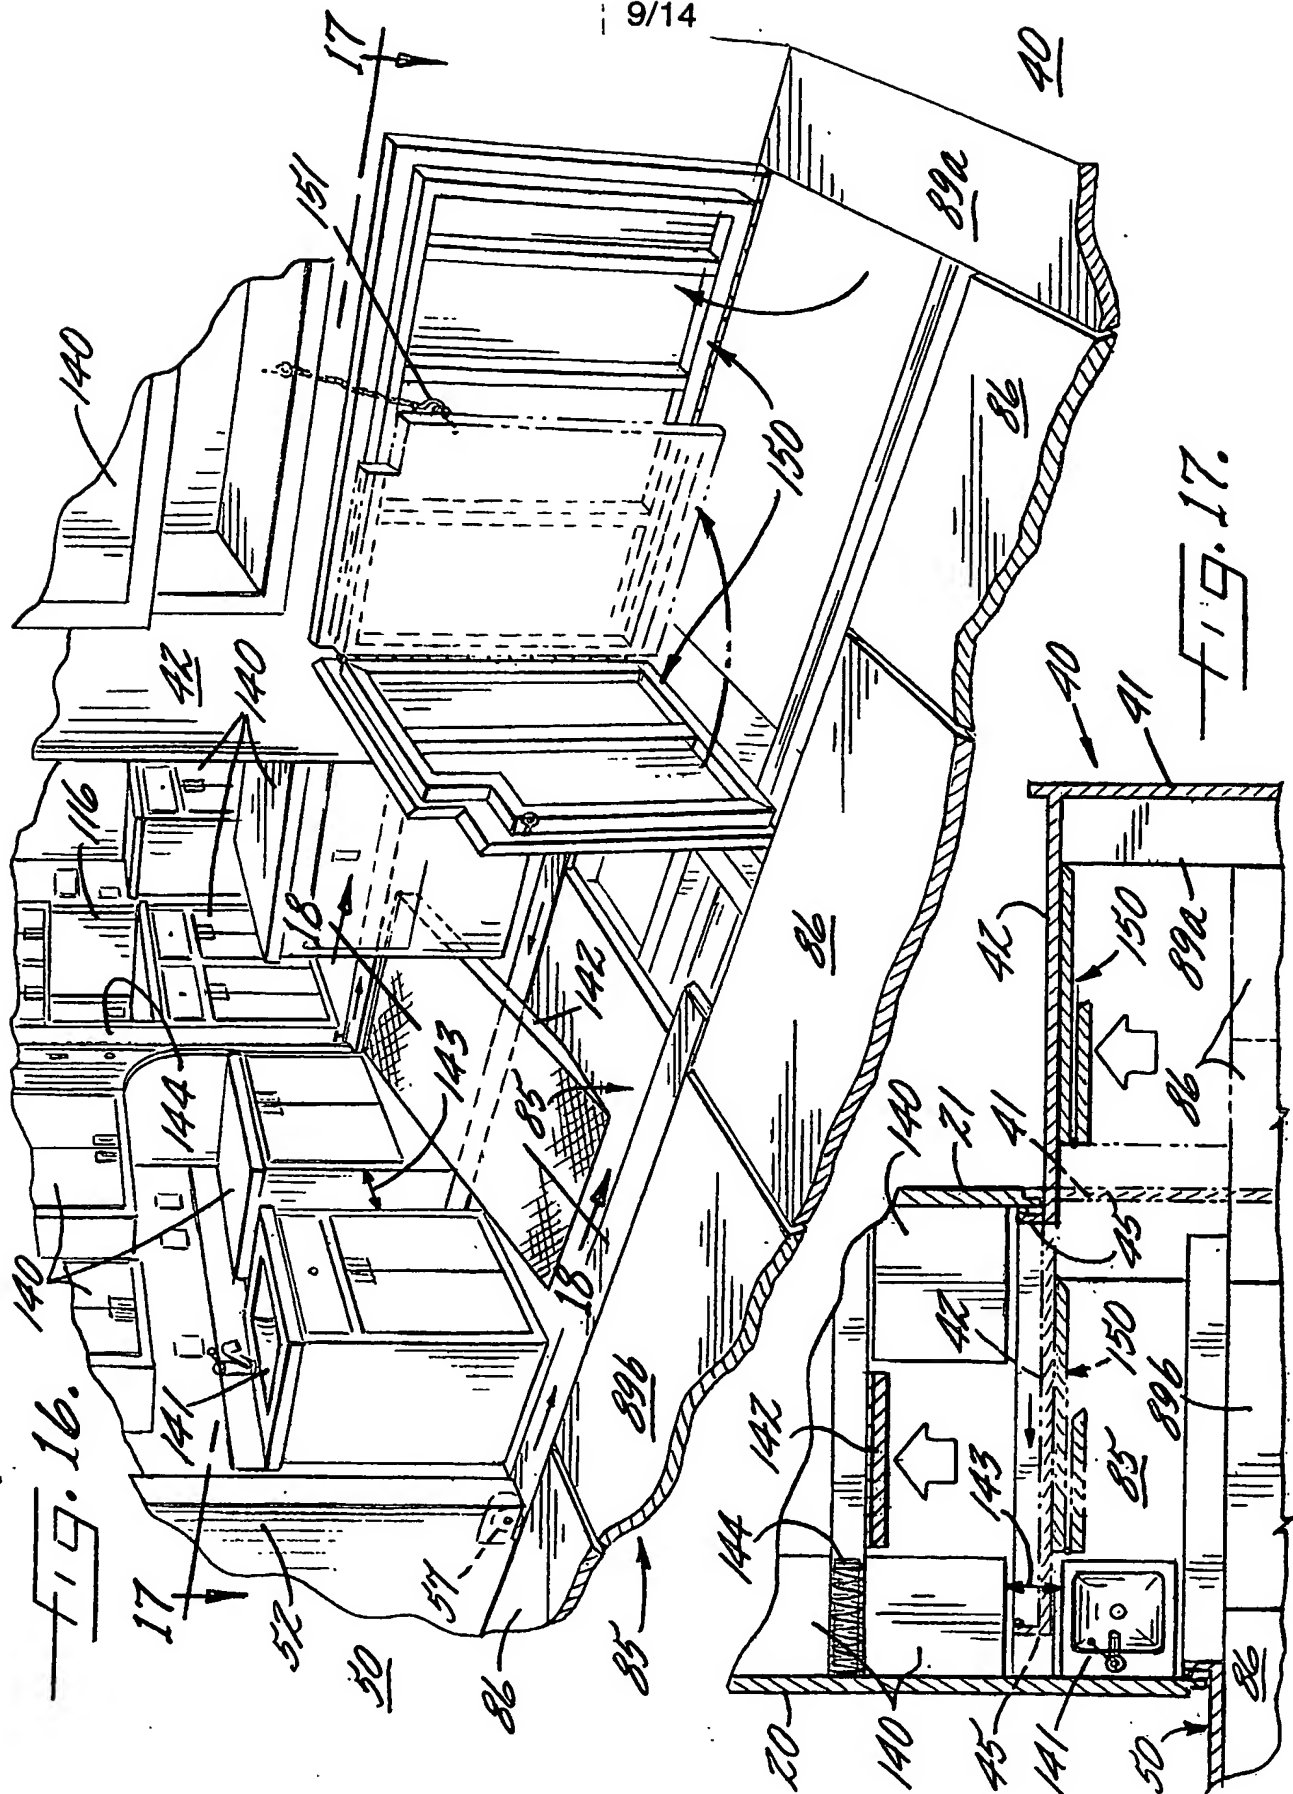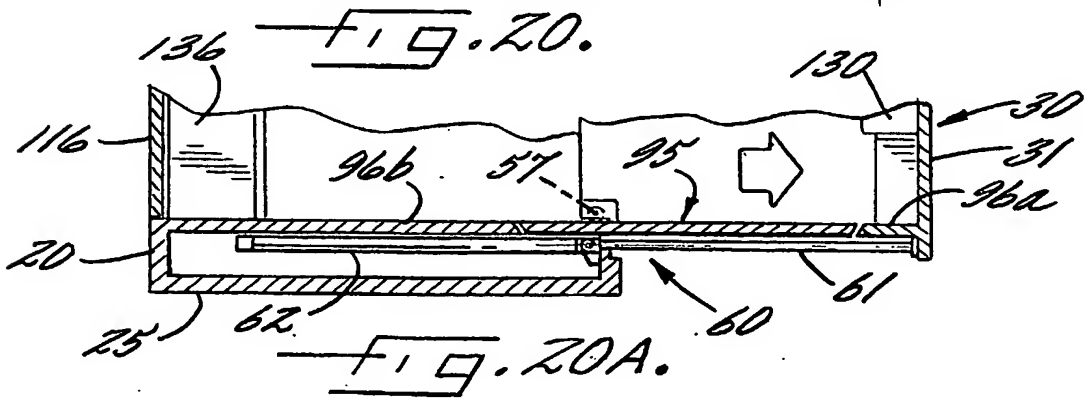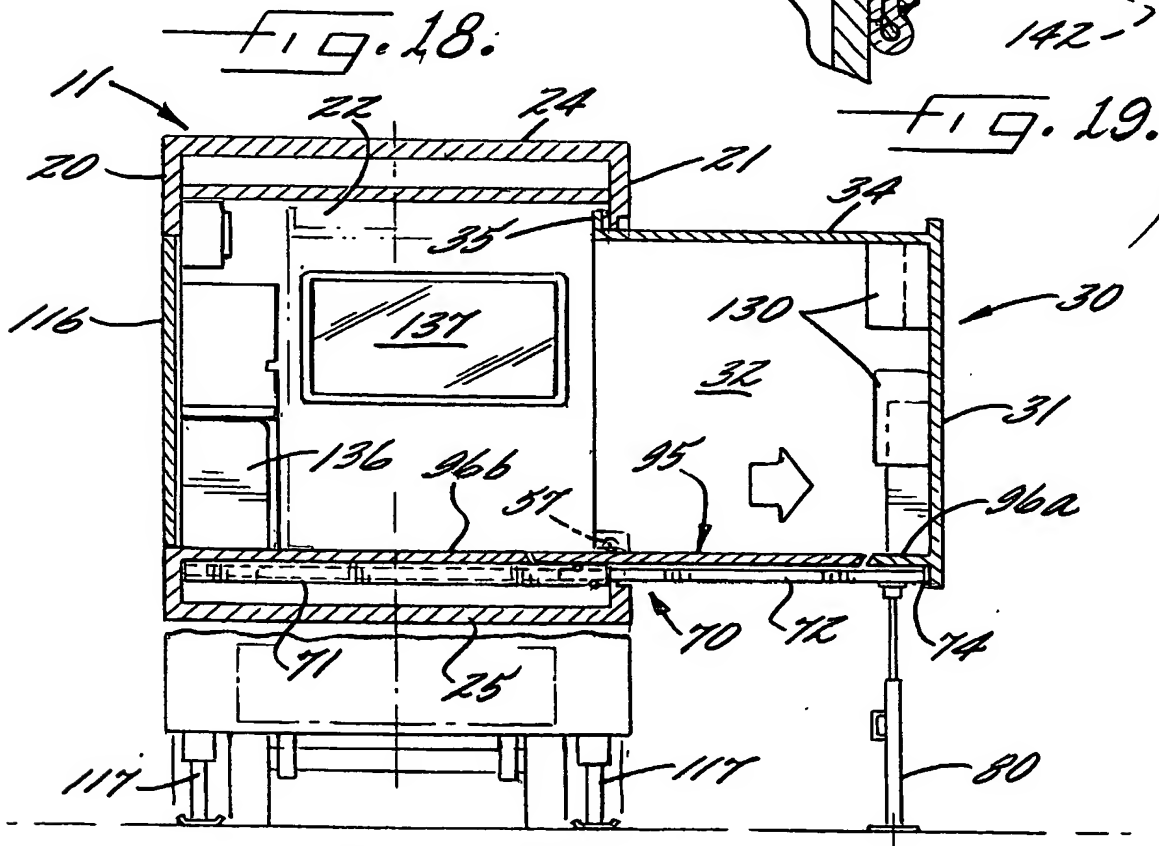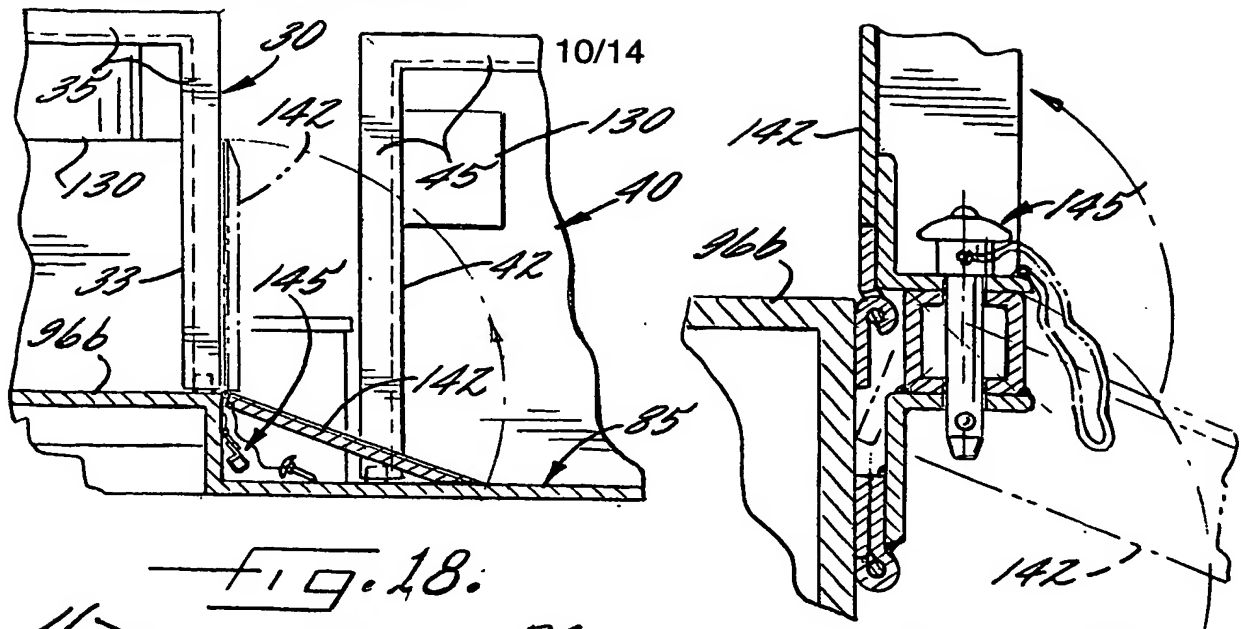


9/14





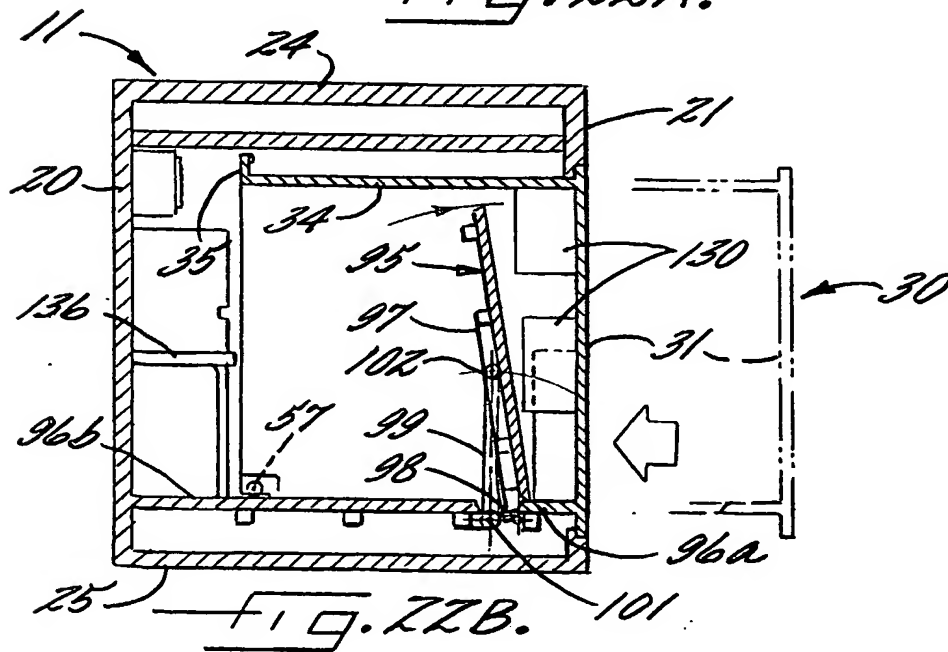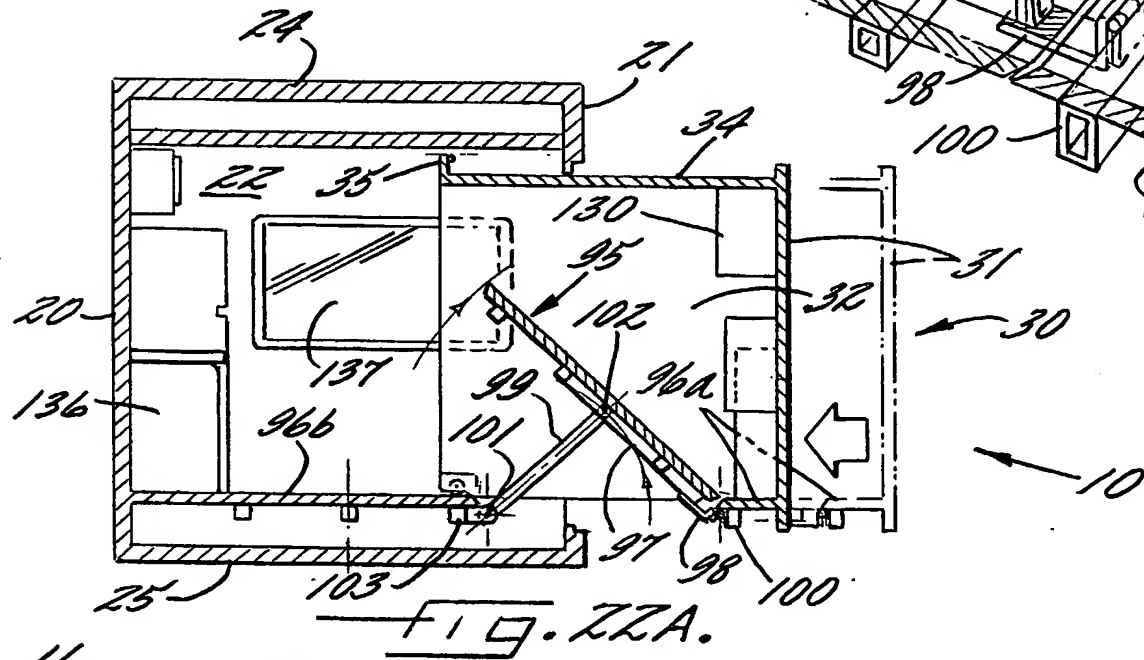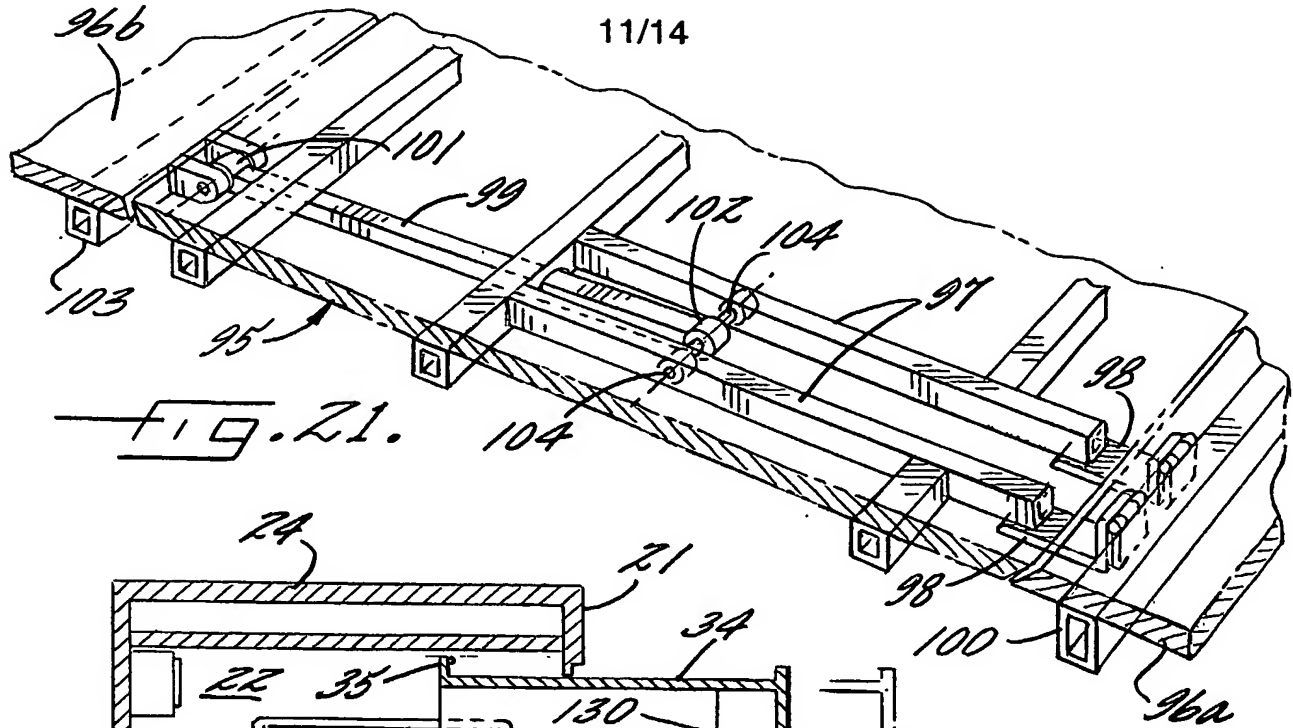



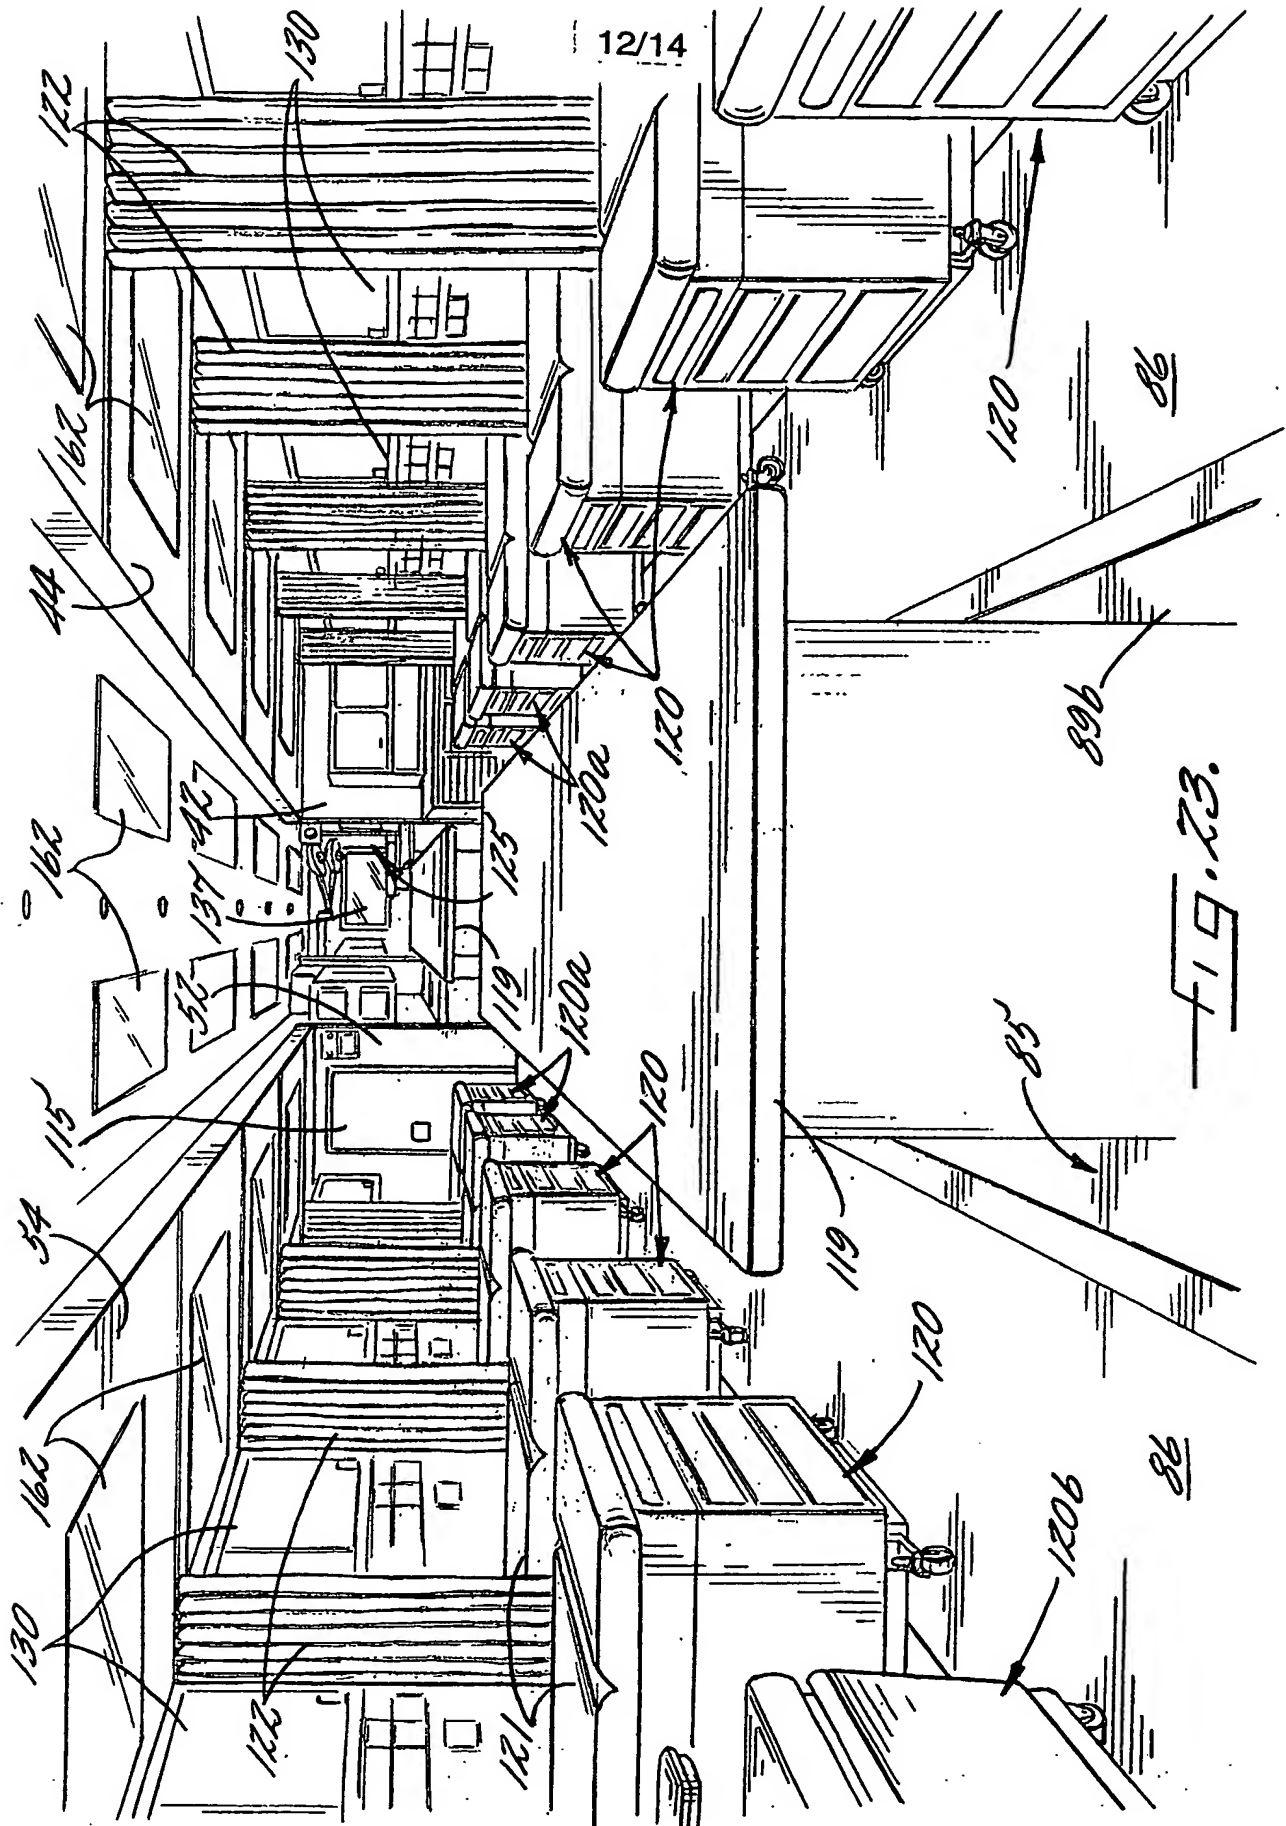


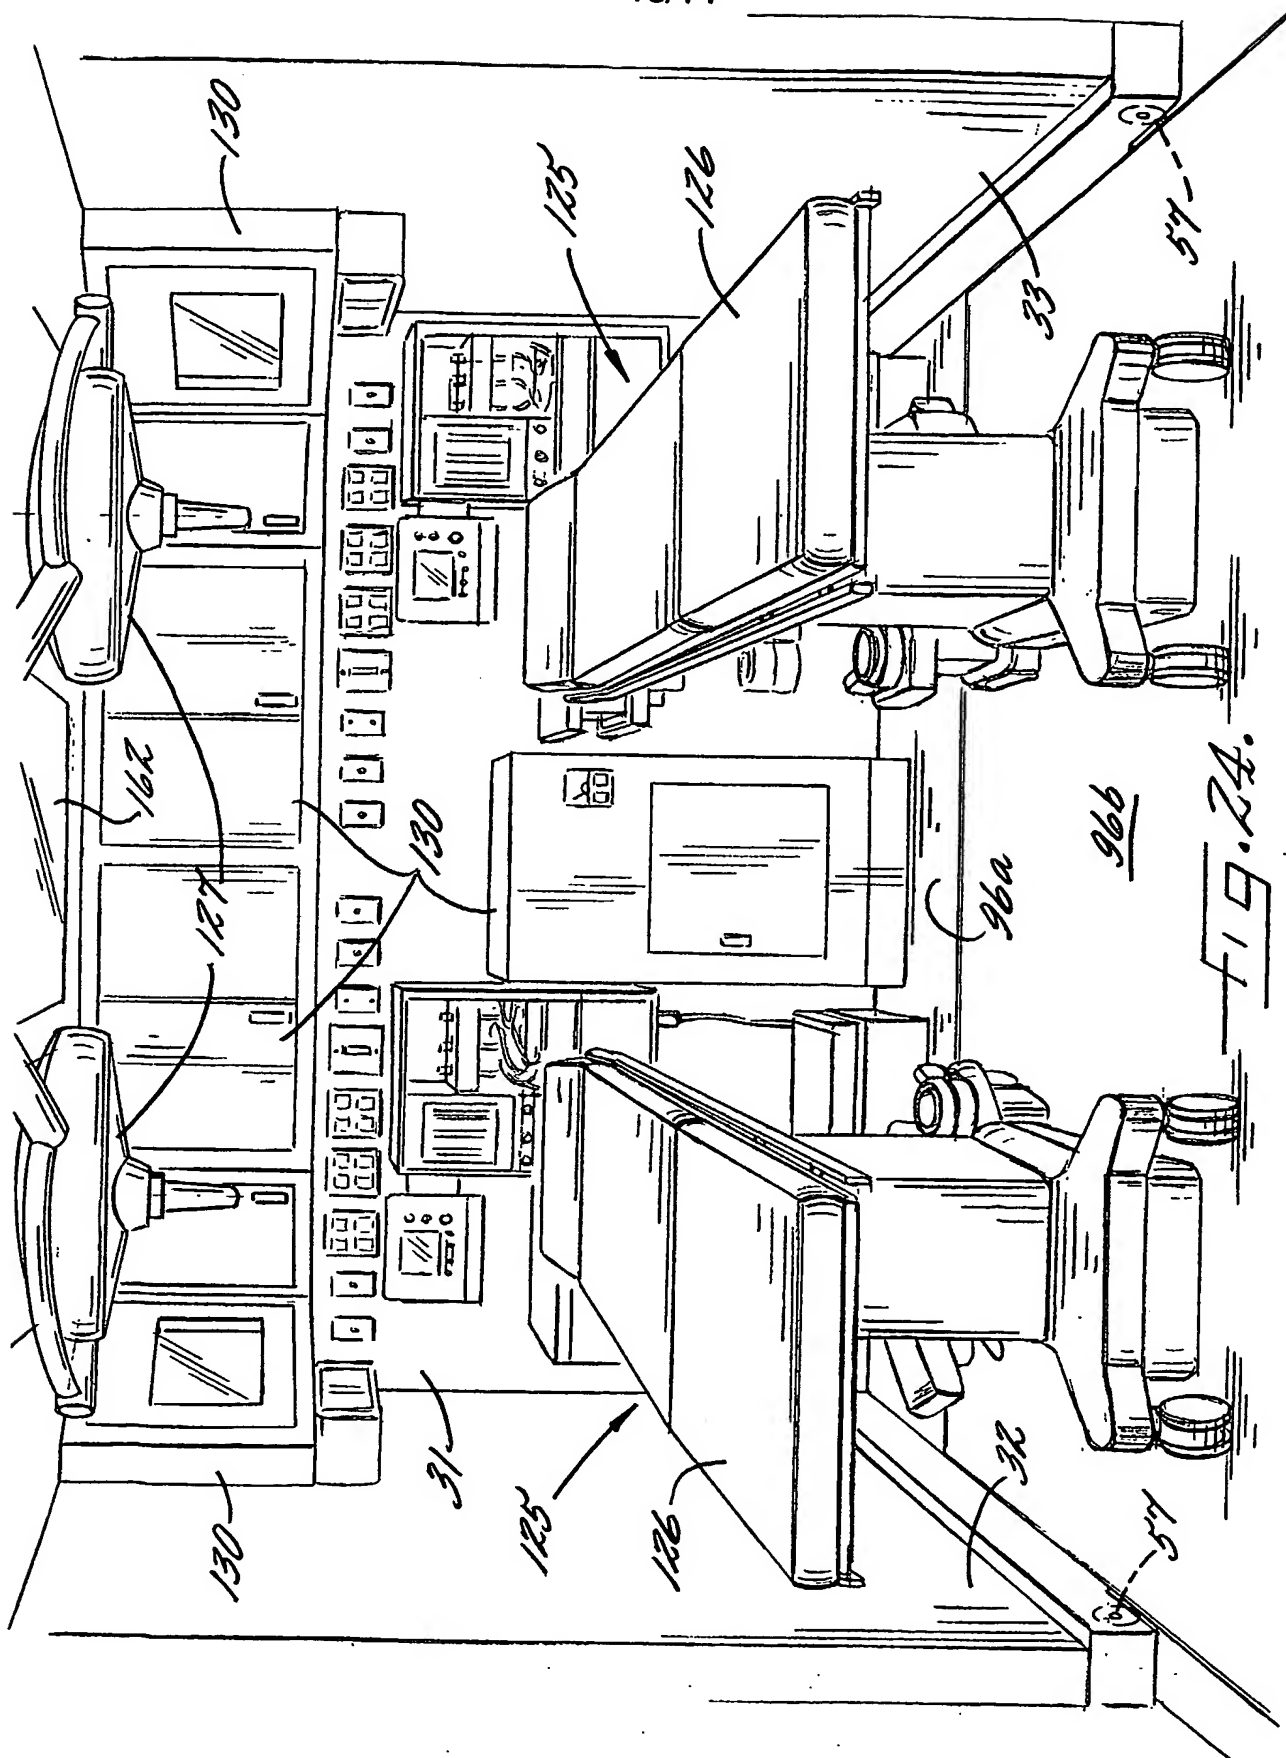


FIG. 24.

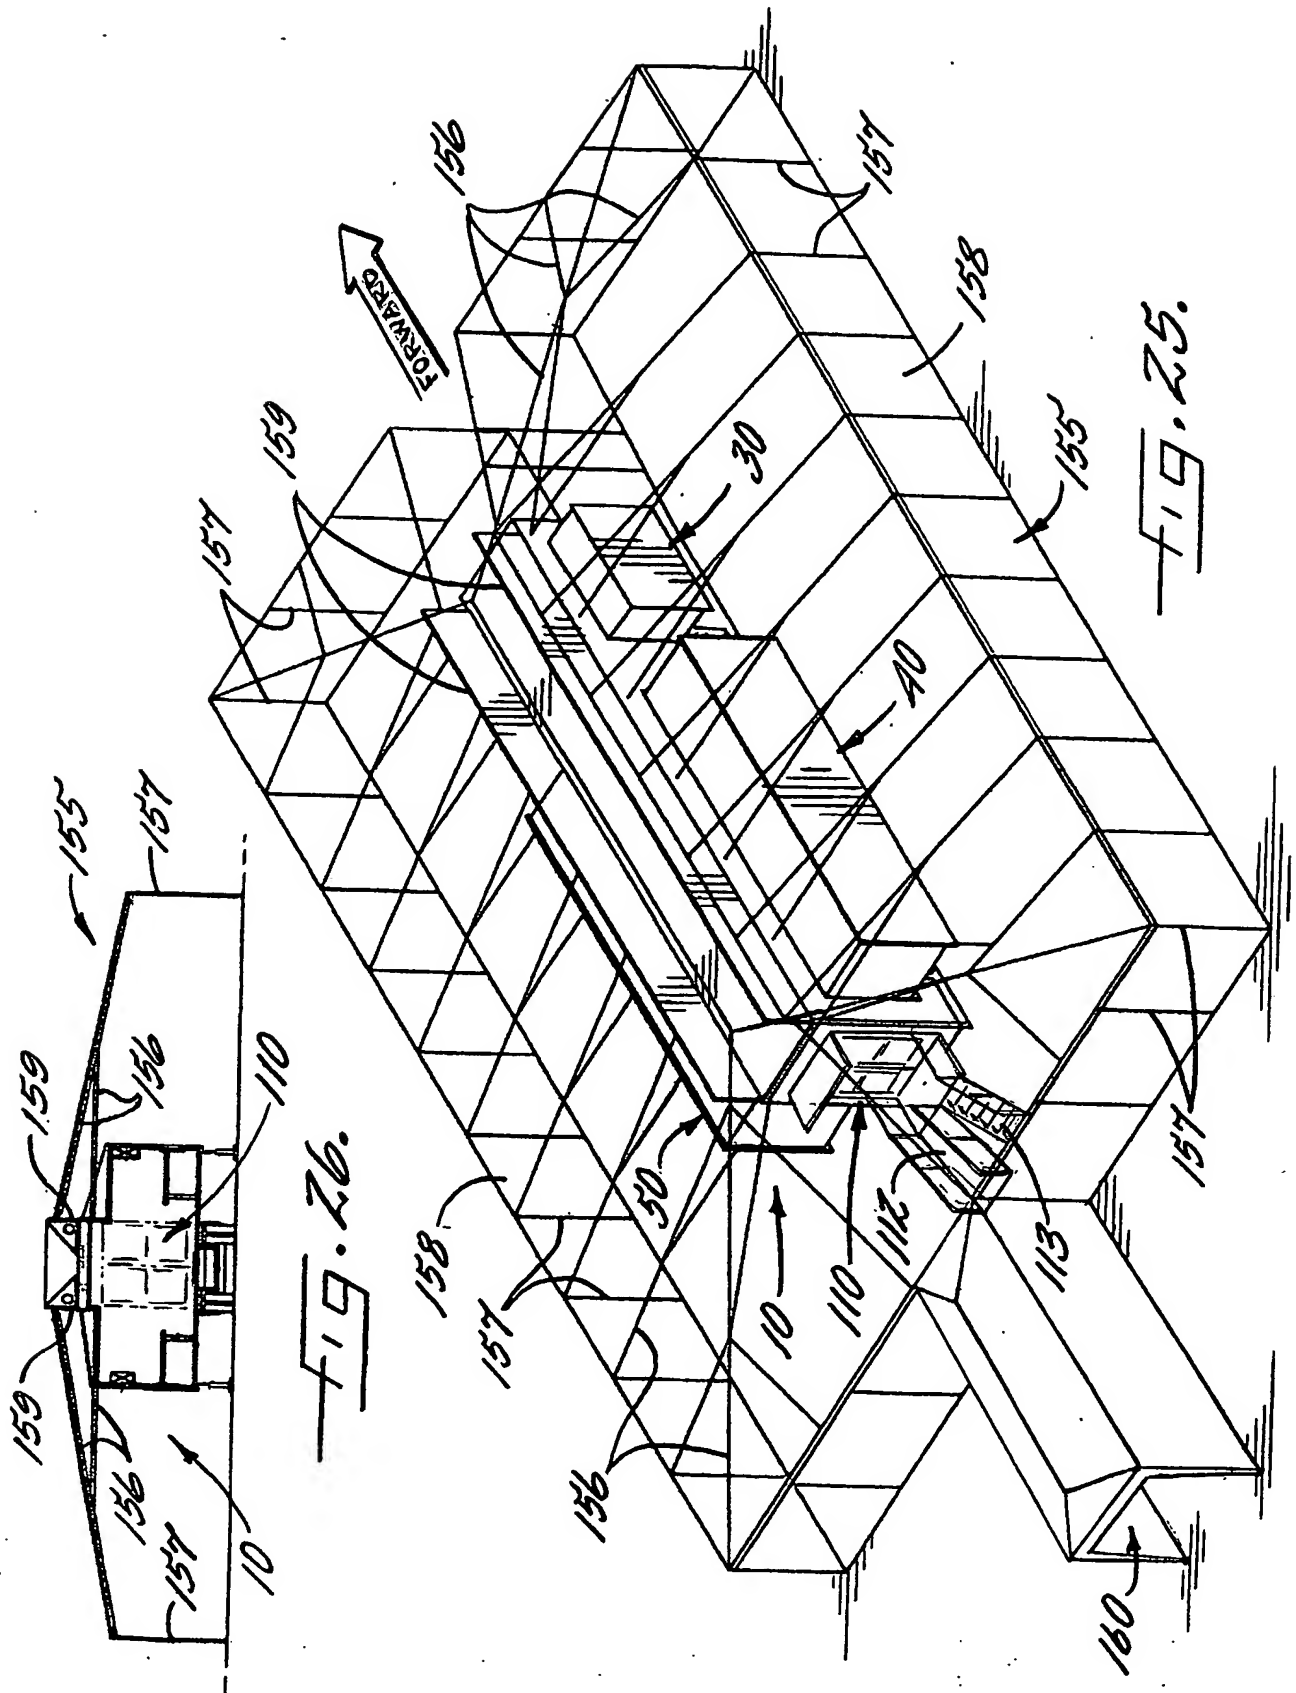

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**